

MINIFLUX LINEA WALL

Miniflux Linea è la nuova gamma di sistemi lineari dedicati all'illuminazione generale e decorativa in interni. Si articola in tre versioni, rispettivamente a sospensione con diffusore trasparente o opale e con fissaggio a parete tramite apposita struttura o clip. Corpo in profilato in alluminio su cui è posizionata una LED strip 24V DC con CRI>97. La collezione è proposta in differenti finiture e temperature colore. Alimentatore remoto incluso (driver on-board per la versione a parete).



WALL 8° | 2700K

LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	2700K
Luminous flux	681lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options
Energy class
Net lamp weight

LED strip
12W
direct
push-button
24V
2700K
681lm
57lm/W
SDCM<3
>97
40
102xø3,2cm
polycarbonate
-20°C / +35°C
25°C
IK08
wall support with integrated driver and dimmable
push button included driver included RAL 9005
black
tube length external electrical cable
F
0,6 kg

Codes

BMLA3908026DAN

Structure

black

PACKAGE


Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg


Certificazioni



MINIFLUX LINEA WALL 8°

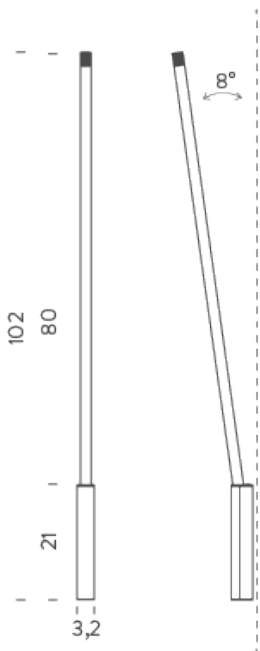

MINIFLUX LINEA WALL

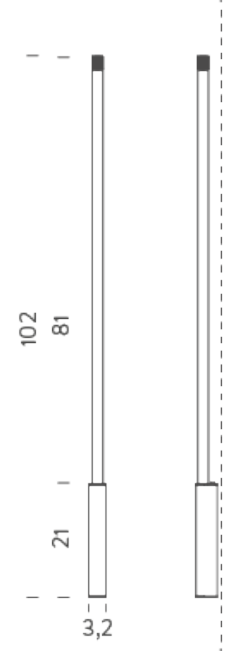

WALL 8° | 3000K

LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	3000K
Luminous flux	717lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	wall support with integrated driver and dimmable push button included driver included RAL 9005 black

Customization options	tube length external electrical cable
Energy class	F
Net lamp weight	0,6 kg

Codes

BMLA3908026WAN

PACKAGE

Package 01

Certificazioni




LED strip
12W
direct
push-button
24V
3000K
717lm
60m/W
SDCM<3
>97
40
102xø3,2cm
polycarbonate
-20°C / +35°C
25°C
IK08
wall support with integrated driver and dimmable push button included driver included RAL 9005 black
tube length external electrical cable
F
0,6 kg

Structure


black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

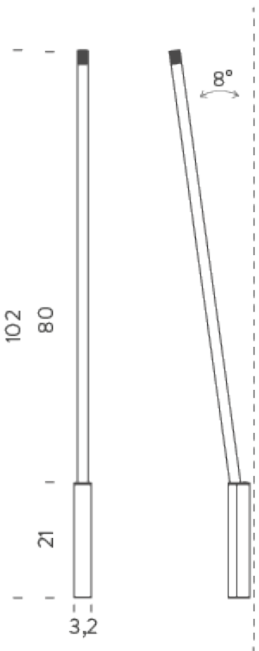

MINIFLUX LINEA WALL

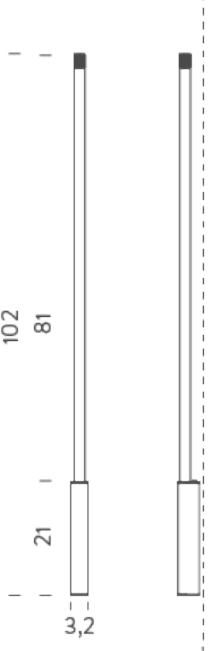

WALL | 2700K

LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	2700K
Luminous flux	681lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

LED strip
12W
direct
push-button
24V
2700K
681lm
57lm/W
SDCM<3
>97
40
102xø3,2cm
polycarbonate
-20°C / +35°C
25°C
IK08
wall support with integrated driver and dimmable
push button included driver included RAL 9005
black
tube length external electrical cable
0,6 kg

Customization options
Net lamp weight

Codes

BMLA3908026DAN

PACKAGE

Package 01

Certificazioni




Structure


black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

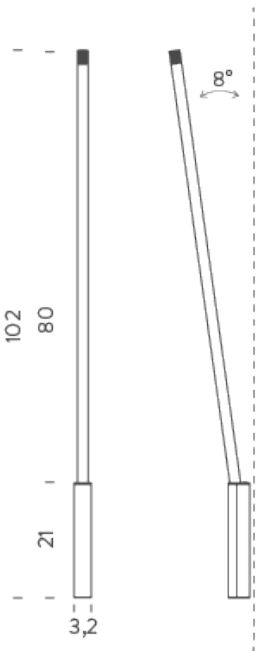

MINIFLUX LINEA WALL

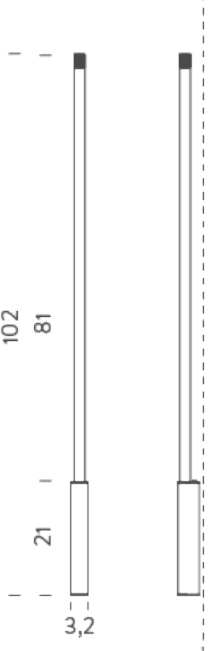

WALL | 3000K

LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	3000K
Luminous flux	717lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	wall support with integrated driver and dimmable push button included driver included RAL 9005 black
Customization options	tube length external electrical cable
Net lamp weight	0,6 kg

Codes

BMLA3908026WAN

PACKAGE

Package 01

Certificazioni




Structure

black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

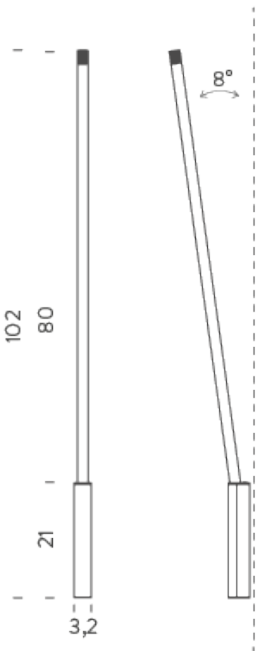

MINIFLUX LINEA WALL

