

MINIFLUX OPAL

MINIFLUX è un sistema a LED modulare per interni/esterni adatto all'illuminazione in velette, decorativa e d'accento. Corpo in profilato in alluminio su cui è posizionata una striscia di Nastro LED 24V DC ad alta emissione. Diffusore in policarbonato opale per un'emissione omogenea della luce. Il fissaggio avviene tramite staffe in policarbonato trasparente che permettono l'orientabilità del prodotto. Miniflux è proposto in diverse lunghezze e temperature colore.

Alimentatore escluso.



1M | 3000K

LAMPING


Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
IP class	65
Dimensions	ø2x103cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes
BBOK0910G26WPO

PACKAGE

Package 01	Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg
------------	---

Certificazioni



1M | 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1005lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
IP class	65
Dimensions	ø2x103cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes

BBOK0910G26NPO

Structure

opal white

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni



2M | 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1800lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
IP class	65
Dimensions	ø2x201cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes
BBOK0920G26WPO

PACKAGE

Package 01 Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni



2M | 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2000lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
IP class	65
Dimensions	ø2x201cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920G26NPO


Structure

opal white

PACKAGE

Package 01	Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg
------------	--

Certificazioni

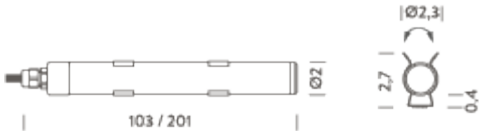

3M | 3000K

LAMPING


Source	LED strip
Total power	45W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2700lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM<3
Typ CRI	97
IP class	65
Dimensions	ø2x201cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes
BBOK0930G26WPO

PACKAGE

Package 01	Dimension: 310x8,5x4 cm / Gross weight: 0,72 kg
------------	---

Certificazioni

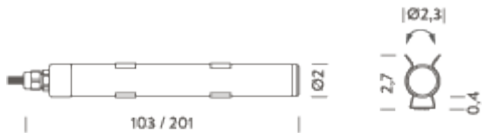

3M | 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	67lm/m
Initial chromaticity	SDCM<3
Typ CRI	94
IP class	65
Dimensions	ø2x201cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes
BBOK0930G26NPO

PACKAGE

Package 01	Dimension: 310x8,5x4 cm / Gross weight: 0,72 kg
------------	---

Certificazioni

