

RIGA TRANSPARENT

RIGA è un famiglia di prodotti che racchiude una selezione di LED strips flessibili per esterni, particolarmente adatta ad un'illuminazione decorativa. Riga è costituito da un nastro LED a 24V inguainato in un profilo in PVC bianco e incapsulato in una resina poliuretanica trasparente, estremamente resistente agli agenti atmosferici e con un eccellente grado di stabilità se esposta a raggi UV. Nella versione con resina trasparente la luce è emessa frontalmente. Riga è proposto in differenti lunghezze. Il fissaggio può avviene tramite staffette (incluse).



1M | 2700K

LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1650lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,22 kg

Codes

MRIG0910035DRE

PACKAGE

Package 01

Certificazioni



Flexible LED strip

9,6W

direct 120°

according to driver

24VDC

2700K

1650lm

146lm/W

SDCM <3

85

68

1,5x0,7x100cm

resin + PVC

-20°C / +50°C

25°C

driver not included, cable length 2m

body length, CCT 2700K


Connectors kit IP68, | Drivers 24VDC + DALI interface,

0,22 kg

Structure

white

Dimension: 22x19x8 cm / Gross weight: 0,55 kg

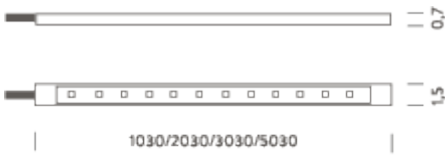

BRACKETS (included)



2M | 2700K

LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	3300lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,48 kg

Codes

MRIG0920035DRE

PACKAGE

Package 01


Certificazioni




Structure

white

Dimension: 22x19x4,5 cm / Gross weight: 0,81 kg

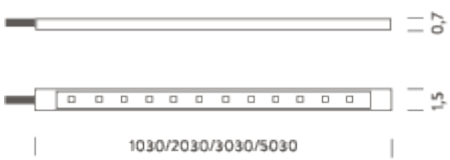

BRACKETS (included)



3M | 2700K

LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4950lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x300cm
Materials	esin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

MRIG0930035DRE

Structure


white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,84 kg

Certificazioni

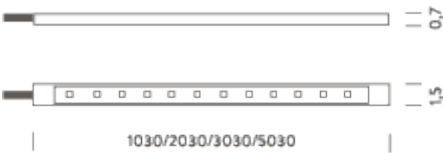

BRACKETS (included)



4M | 2700K

LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	6600lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,96 kg

Codes

MRIG0940035DRE

PACKAGE

Package 01


Certificazioni




Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 1,08 kg

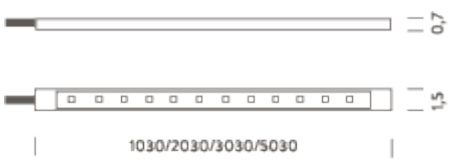

BRACKETS (included)



5M | 2700K

LAMPING

Source	Flexible LED strip
Total power	48W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	8250lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MRIG0950035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 1,32 kg

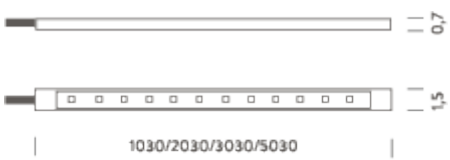

BRACKETS (included)

