

ZIRKOL CIRCLE WALL

Dedicato ad un'illuminazione indiretta e dalla forte connotazione decorativa, Zirkol Wall è la nuova lampada della collezione, proposta con una forma circolare e fissaggio a parete. Tre temperature colore LED disponibili, 2700K, 3000K o 4000K e finitura nera. La lunghezza delle tigi incluse, permette di creare differenti composizioni di più lampade, per un'illuminazione d'ambiente personalizzata.



Ø 1M | 2700K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
45W
indirect diffused
DALI
24V
2700K
2616lm
58lm/W
SDCM<3
90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C

included: 1 x driver 60W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission

Customization options

external electrical cable | light configurations,
separate light control, control systems

Energy class

E

Net lamp weight

4 kg

Codes

BZRC4210G15DNE

Structure


black

PACKAGE

Package 01

Dimension: 110x110x15 cm / Gross weight: 6,5 kg

Certificazioni

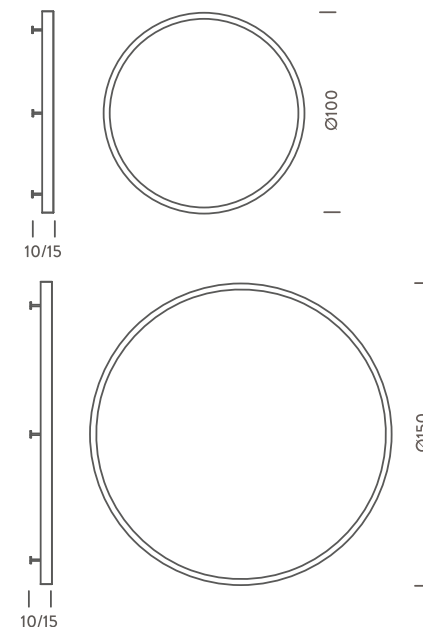

Ø 1M | 3000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
45W
indirect diffused
DALI
24V

3000K
2769lm
62lm/W
SDCM<3

90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C

included: 1 x driver 60W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission

Customization options

external electrical cable | light configurations,
separate light control, control systems

Energy class
Net lamp weight

E
4 kg

Codes

BZRC4210G15WNE

Structure


black

PACKAGE

Package 01

Dimension: 110x110x15 cm / Gross weight: 6,5 kg

Certificazioni

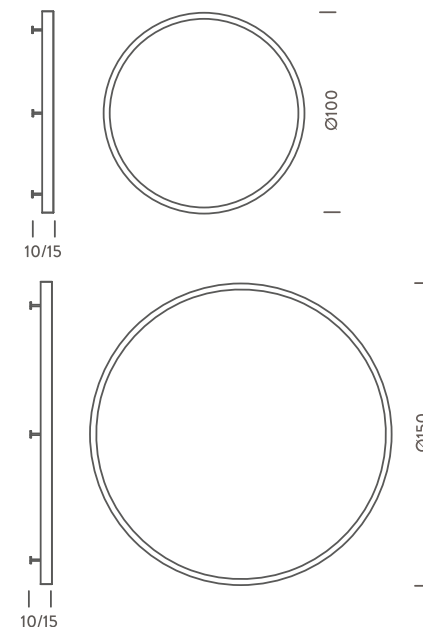

Ø 1M | 4000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
45W
indirect diffused

DALI
24V
4000K
3077lm
68lm/W
SDCM<3

90
40
Ø100x5cm
aluminum
0°C / +35°C
25°C

included: 1 x driver 60W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission

Customization options

external electrical cable | light configurations,
separate light control, control systems

Energy class
Net lamp weight

D
4 kg

Codes

BZRC4210G15NNE

Structure


black

PACKAGE

Package 01

Dimension: 110x110x15 cm / Gross weight: 6,5 kg

Certificazioni

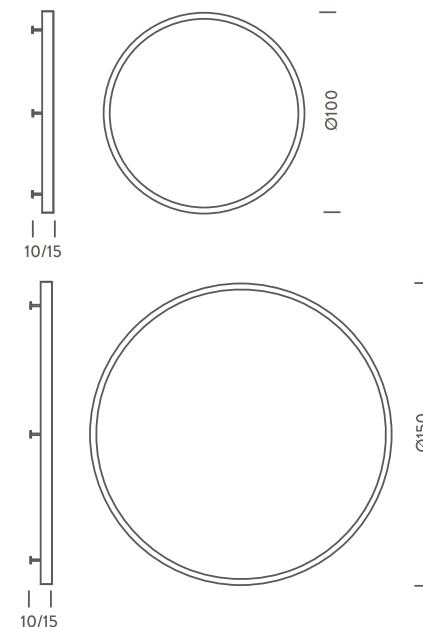

Ø 1,5M | 2700K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
68W
indirect diffused
DALI
24V
2700K
3923lm
57lm/W
SDCM<3
90
40
Ø150x5cm
aluminum
0°C / +35°C
25°C

included: 1 x driver 75W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission

Customization options

external electrical cable | light configurations,
separate light control, control systems

Energy class

E

Net lamp weight

4 kg

Codes

BZRC4215G15DNE

Structure


black

PACKAGE

Package 01

Dimension: 160x160x15 cm / Gross weight: 6,5 kg

Certificazioni

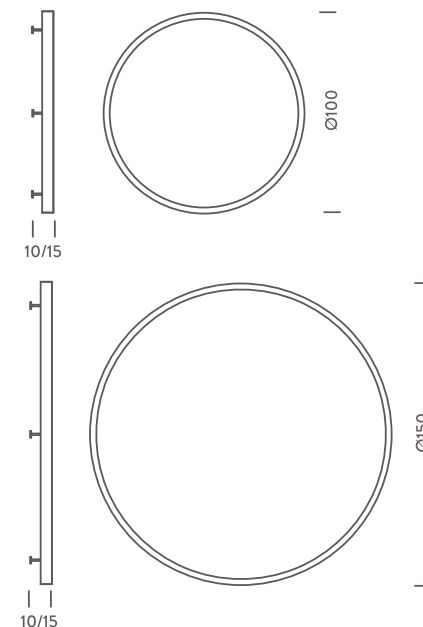

Ø 1,5M | 3000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
68W
indirect diffused

DALI
24V

3000K

4154lm

61lm/W

SDCM<3

90

40

Ø150x5cm

aluminum

0°C / +35°C

25°C

included: 1 x driver 75W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission

Customization options

external electrical cable | light configurations,
separate light control, control systems

Energy class

E

Net lamp weight

4 kg

Codes

BZRC4215G15WNE

Structure


black

PACKAGE

Package 01

Dimension: 160x160x15 cm / Gross weight: 6,5 kg

Certificazioni

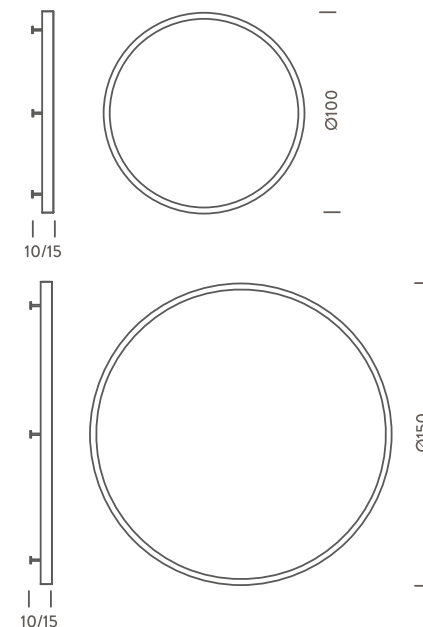

Ø 1,5M | 4000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
68W
indirect diffused

DALI
24V

4000K

4616lm

68lm/W

SDCM<3

90

40

Ø150x5cm

aluminum

0°C / +35°C

25°C

included: 1 x driver 75W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission

Customization options

external electrical cable | light configurations,
separate light control, control systems

Energy class

D

Net lamp weight

4 kg

Codes

BZRC4215G15NNE

Structure

black

PACKAGE

Package 01

Dimension: 160x160x15 cm / Gross weight: 6,5 kg

Certificazioni

