

MINIFLUX GARDEN

Miniflux Garden è dedicato ad un'applicazione in esterni e con fissaggio nel terreno. È orientabile e, se completato con un apposito anello accessorio, inclinabile rispetto al piano. Rappresenta così una soluzione luminosa e allo stesso tempo decorativa.



0,82M | 2700K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	8W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	2700K
Luminous flux	461lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x82cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,
Net lamp weight	0,7 kg

Codes

BMGT30082G26DAN

Structure


black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm / Gross weight: 0,7 kg

Certificazioni

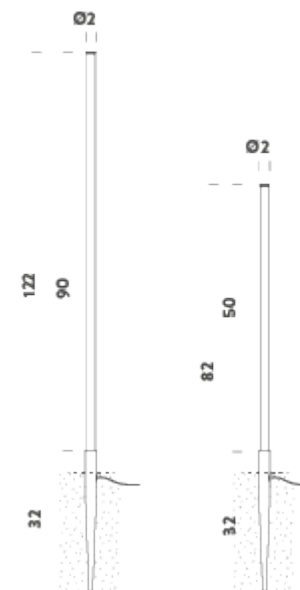

0,82M | 3000K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	8W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	3000K
Luminous flux	512lm
Initial luminaire efficacy	64lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x82cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,
Net lamp weight	0,7 kg

Codes

BMGT30082G26WAN

Structure


black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm / Gross weight: 0,7 kg

Certificazioni

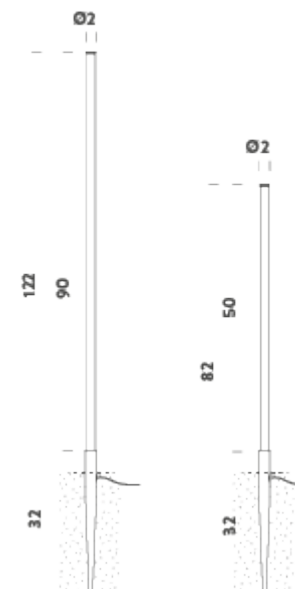

0,82M | 4000K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	8W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	4000K
Luminous flux	560lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x82cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,
Net lamp weight	0,7 kg

Codes

BMGT30082G26NAN

Structure


black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm / Gross weight: 0,7 kg

Certificazioni

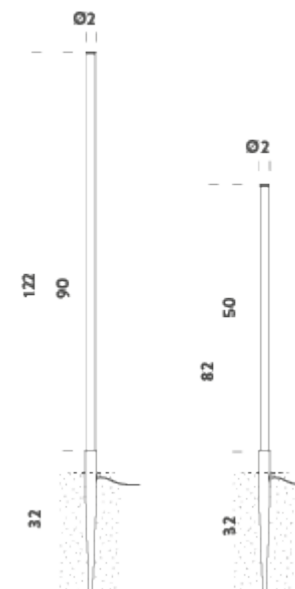

1,2M | 2700K

LAMPING

Source	LED strip
Total power	14W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	2700K
Luminous flux	830lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x122cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,

Codes

BMGT30122G26DAN

Structure

black

PACKAGE


Package 01

Dimension: 100x8,5x4 cm

Certificazioni



MINIFLUX GARDEN

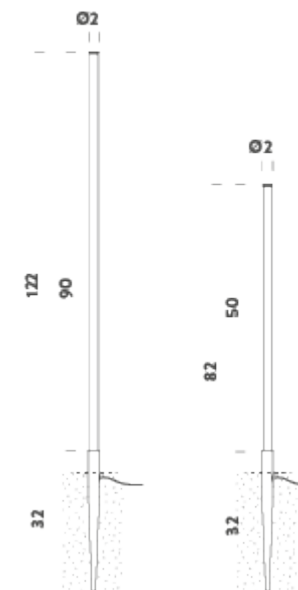

1,2M | 3000K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	14W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	3000K
Luminous flux	923lm
Initial luminaire efficacy	66lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x122cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,

Codes

BMGT30122G26WAN

Structure


black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm

Certificazioni

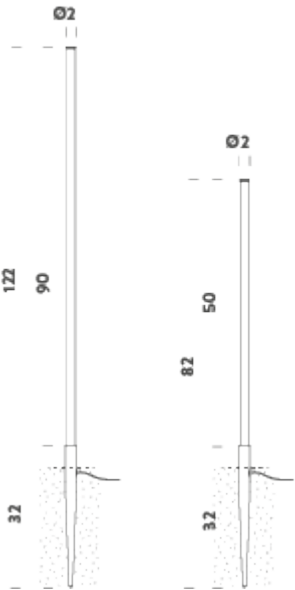

1,2M | 4000K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	14W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	4000K
Luminous flux	1025lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x122cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,

Codes

BMGT30122G26NAN

Structure

black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm

Certificazioni

