

MINIFLUX LINEA OPAL

Miniflux Linea Opal è un sistema a LED a sospensione destinato all'illuminazione in interni. Corpo in profilato in alluminio su cui è posizionata una striscia di Nastro LED 24V DC. CRI>97. Diffusore in policarbonato opale per un'emissione di luce omogenea. É proposto con finitura black, red e gold. Miniflux è disponibile in due temperature colore e nelle versioni TRIAC e DALI. Alimentatore remoto incluso.



TRIAC | 2700K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	2700K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	included: canopy with 1 x driver 1 x electrical cable 3m 2 x adjustable metal cables 2m driver included canopy RAL 9005 black for black finish canopy RAL 9016 white for red/gold finish

Customization options
Energy class
Net lamp weight

Codes


BMLO2710G26DAN
BMLO2710G26DAR
BMLO2710G26DAO

Certificazioni



Structure

black
red
gold

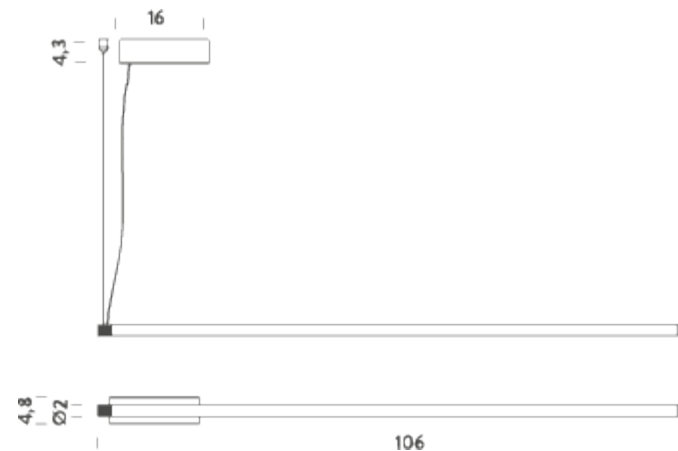

TRIAC | 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options
Energy class
Net lamp weight

included: canopy with 1 x driver | 1 x electrical
cable 3m | 2 x adjustable metal cables 2m | driver
included | canopy RAL 9005 black for black finish |
canopy RAL 9016 white for red/gold finish
tube length
F
0,6 kg

Codes

BMLO2710G26WAN
BMLO2710G26WAR
BMLO2710G26WAO

Structure


black
red
gold

PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

Certificazioni

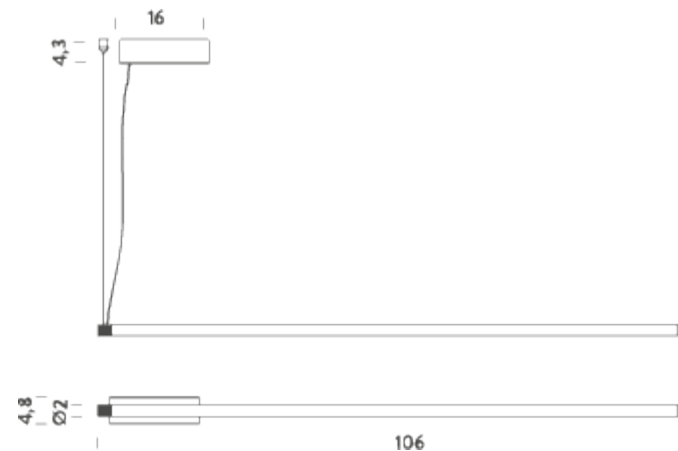

DALI | 2700K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	included: canopy with 1 x driver 1 x electrical cable 3m 2 x adjustable metal cables 2m driver included canopy RAL 9005 black for black finish canopy RAL 9016 white for red/gold finish

Customization options
Energy class
Net lamp weight

Codes

BMLO1610G26DAN
BMLO1610G26DAR
BMLO1610G26DAO

PACKAGE

Package 01

Certificazioni




included: canopy with 1 x driver | 1 x electrical cable 3m | 2 x adjustable metal cables 2m | driver included | canopy RAL 9005 black for black finish | canopy RAL 9016 white for red/gold finish

Structure

black
red
gold

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

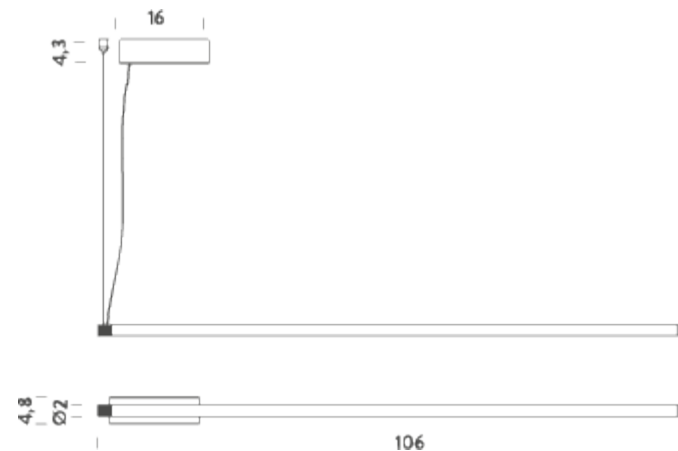

DALI | 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	included: canopy with 1 x driver 1 x electrical cable 3m 2 x adjustable metal cables 2m driver included canopy RAL 9005 black for black finish canopy RAL 9016 white for red/gold finish
Customization options	tube length
Energy class	F
Net lamp weight	0,6 kg

Codes

BMLO1610G26WAN
BMLO1610G26WAR
BMLO1610G26WAO

PACKAGE

Package 01

Certificazioni



Structure

black
red
gold

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

