

POP UP

Pop up è uno spot orientabile da incasso rotondo trim, dedicato all'illuminazione d'accento. Proposto nella finitura white/black.



2700K

LAMPING

Source	1x LED COB
Total power	10W
Emission	direct orientable 38°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	630lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	Ø10x10,9cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	driver not included, orientable spot, recessed hole Ø90mm, cable length 0,3m
Energy class	G
Net lamp weight	0,75 kg

Codes

MPOP0101758DNE
MPOP0101758DBO

Structure


black
white

PACKAGE

Package 01

Dimension: 11,5x11,5x12 cm / Gross weight: 0,8 kg

Certificazioni

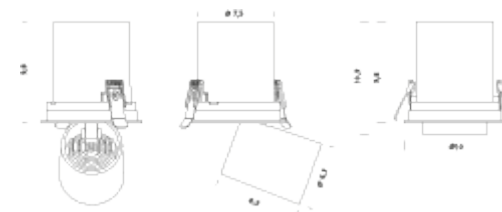

3000K

LAMPING

Source	1x LED COB
Total power	10W
Emission	direct orientable 38°
Switching	according to driver
Tension	max 270mA
Color temperature	3000K
Luminous flux	700lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	Ø10x10,9cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	driver not included, orientable spot, recessed hole Ø90mm, cable length 0,3m
Energy class	G
Net lamp weight	0,75 kg

Codes

MPOP0101758WNE
MPOP0101758WBO

Structure

black
white

PACKAGE

Package 01 Dimension: 11,5x11,5x12 cm / Gross weight: 0,8 kg

Certificazioni

