


SALINA CEILING

Famiglia di faretti downlight per illuminazione in interni. La struttura modulare separa la lampada in più parti indipendenti. Gli anelli esterni con diverse finiture sono semplici da montare. Salina Ceiling è proposto con diverse ottiche accessorie, per soddisfare differenti necessità di illuminazione.



15° | 2700K

LAMPING

Source	1x LED COB
Total power	12W
Emission	direct 15°
Switching	ON/OFF
Tension	220/250V
Color temperature	2700K
Luminous flux	640lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,2x15cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	ring not included, anti light loss system
Net lamp weight	0,48 kg

Codes

SALLN241
SALLW241

Structure


black
white

PACKAGE

Package 01

Dimension: 19x9x8 cm / Gross weight: 0,55 kg

Certificazioni

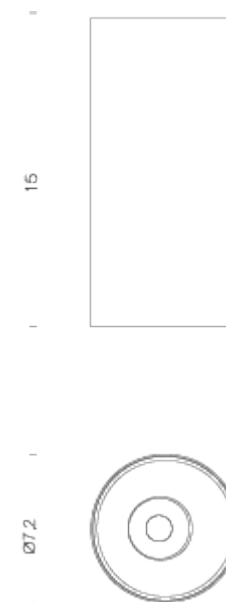

15° | 3000K

LAMPING

Source	1x LED COB
Total power	12W
Emission	direct 15°
Switching	ON/OFF
Tension	220/250V
Color temperature	3000K
Luminous flux	740lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,2x15cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	ring not included, anti light loss system
Net lamp weight	0,44 kg

Codes

SALLN243
SALLW243

Structure


black
white

PACKAGE

Package 01

Dimension: 19x9x8 cm / Gross weight: 0,55 kg

Certificazioni

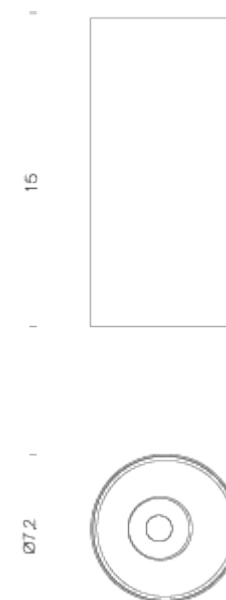

35° | 2700K

LAMPING

Source	1x LED COB
Total power	12W
Emission	direct 35°
Switching	ON/OFF
Tension	220/250V
Color temperature	2700K
Luminous flux	670lm
Initial luminaire efficacy	56lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,2x15cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	ring not included, anti light loss system
Net lamp weight	0,8 kg

Codes

SALLN243
SALLW243

Structure


black
white

PACKAGE

Package 01

Dimension: 19x9x8 cm / Gross weight: 0,55 kg

Certificazioni

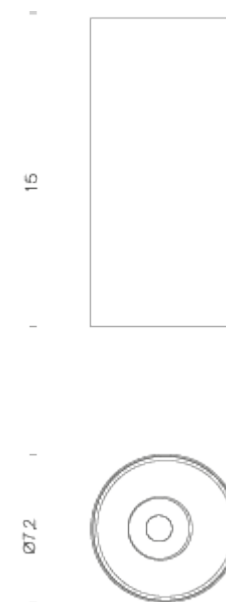

35° | 3000K

LAMPING

Source	1x LED COB
Total power	12W
Emission	direct 35°
Switching	ON/OFF
Tension	220/250V
Color temperature	3000K
Luminous flux	770lm
Initial luminaire efficacy	64lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,2x15cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	ring not included, anti light loss system
Net lamp weight	0,48 kg

Codes

SALLN343
SALLW343

Structure

black
white

PACKAGE

Package 01

Dimension: 19x9x8 cm / Gross weight: 0,55 kg

Certificazioni

