

WALKLINE FAÇADE

Walkline Façade è un sistema di illuminazione plafone a LED per esterni, destinato all'illuminazione di facciate. È composto da un profilo di alluminio anodizzato naturale e da una superficie in resina trasparente. Walkline Façade può essere orientato e viene proposto in differenti lunghezze e con ottica wallwasher 30°. È dimmerabile 1-10V, DALI o DMX.



0,61M | 3000K

LAMPING

Source	LED strip
Total power	11W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1030lm
Initial luminaire efficacy	94lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	61,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	1,5 kg

Codes

BWLFS806452WAA

Structure


grey

PACKAGE

Package 01

Dimension: 63x3x9 cm / Gross weight: 1,5 kg

Certificazioni

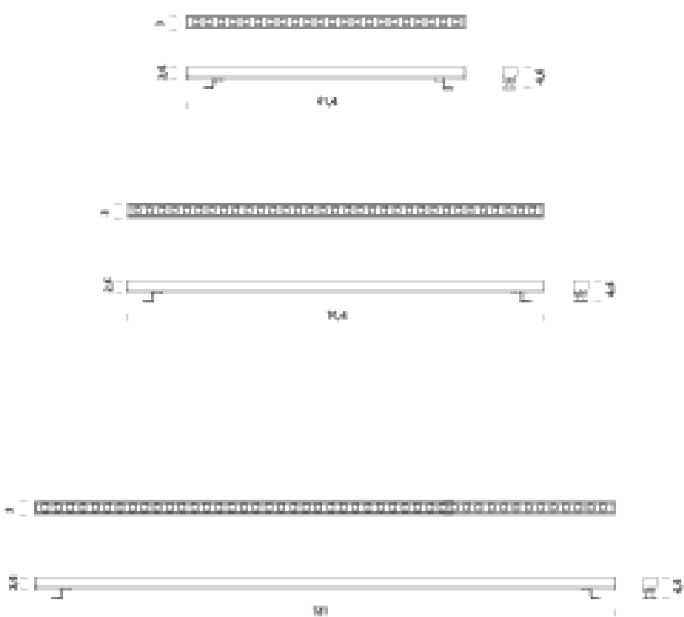

0,61M | 4000K

LAMPING

Source	LED strip
Total power	11W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1144lm
Initial luminaire efficacy	104lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	61,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	1,5 kg

Codes

BWLFS806452NAA

Structure


grey

PACKAGE

Package 01

Dimension: 63x3x9 cm / Gross weight: 1,5 kg

Certificazioni

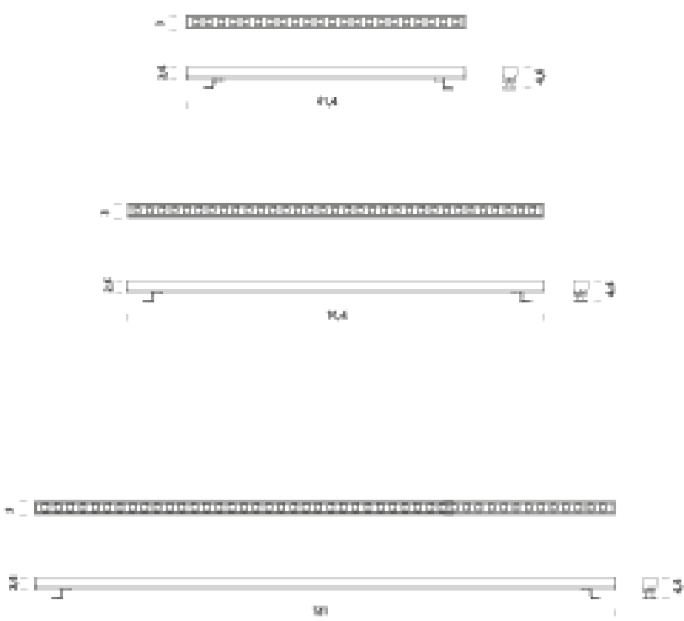

0,91M | 3000K

LAMPING

Source	LED strip
Total power	16W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2060lm
Initial luminaire efficacy	129lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	91,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	2,3 kg

Codes

BWLFS809452WAA

Structure


grey

PACKAGE

Package 01

Dimension: 93x3x9 cm / Gross weight: 2,3 kg

Certificazioni

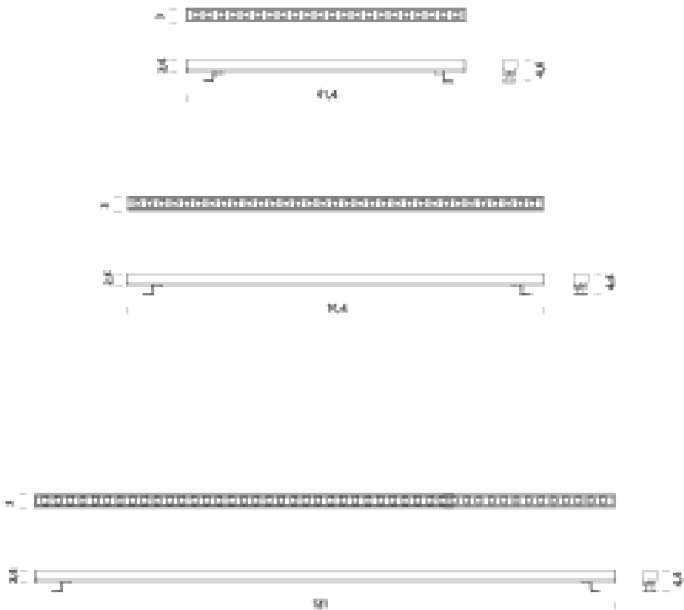

0,91M | 4000K

LAMPING

Source	LED strip
Total power	16W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2228lm
Initial luminaire efficacy	139lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	91,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	2,3 kg

Codes

BWLFS809452NAA

Structure


grey

PACKAGE

Package 01

Dimension: 93x3x9 cm / Gross weight: 2,3 kg

Certificazioni

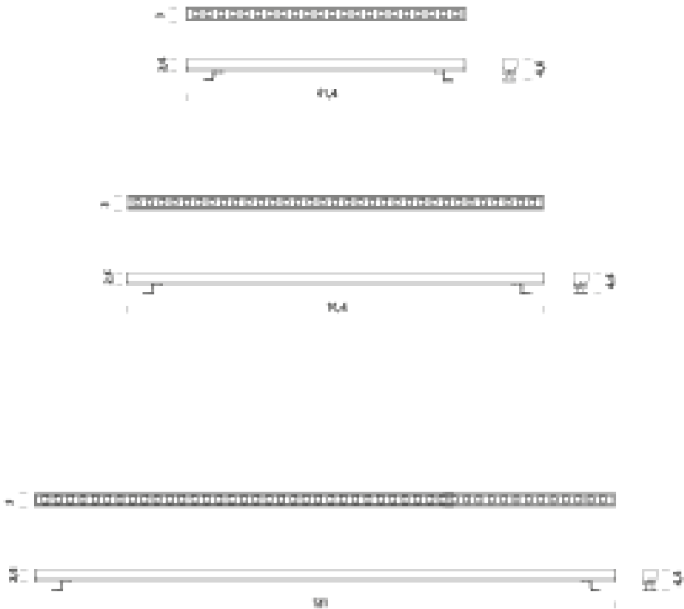

1,21M | 3000K

LAMPING

Source	LED strip
Total power	22W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	3433lm
Initial luminaire efficacy	156lm/m
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	121,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	3 kg

Codes

BWLFS812452WAA

PACKAGE

Package 01


Certificazioni



Structure

grey

Dimension: 123x3x9 cm / Gross weight: 3 kg

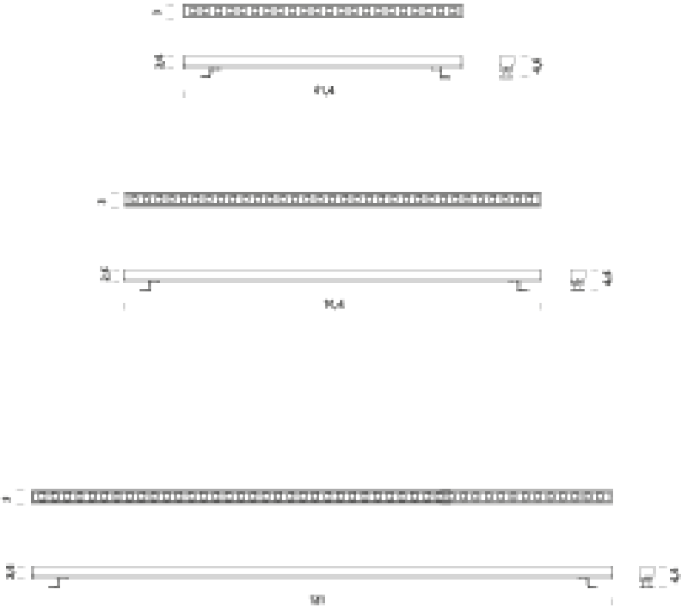

1,21M | 4000K

LAMPING

Source	LED strip
Total power	22W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3815lm
Initial luminaire efficacy	173lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	121,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	3 kg

Codes

BWLFS812452NAA

Structure

grey

PACKAGE

Package 01

Dimension: 123x3x9 cm / Gross weight: 3 kg

Certificazioni

