

WALKLINE WALL WASHER

WALKLINE è un sistema lineare di illuminazione a LED 24V DC per esterni.

È proposto in due versioni dedicate rispettivamente ad un'illuminazione omogenea, ottenuta tramite una superficie in resina opale o wall-washer, dotato di apposita ottica. La famiglia WALKLINE viene proposta in differenti lunghezze e temperature colore. È dimmerabile 1-10V, DALI o DMX ed il fissaggio avviene tramite cassaforma a pavimento inclusa. WALKLINE e WALKLINE WALL-WASHER hanno un elevato indice di resistenza: sono infatti entrambi calpestabili e carrabili. Trovano applicazione in ambientazioni outdoor con necessità di illuminazione di segnalazione o decorativa.



0,61M | 3000K

LAMPING

Source	LED strip
Total power	12W
Emission	asymmetric 45°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1030lm
Initial luminaire efficacy	86lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	61x3x9,25cm
Materials	aluminium
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load

Customization options
Accessories
Net lamp weight

body length
Drivers 24VDC + DALI interface,
1,75 kg

Codes

BWLK0206W52WAA

Structure


grey

PACKAGE

Package 01

Dimension: 52x3x9 cm / Gross weight: 1,75 kg

Certificazioni

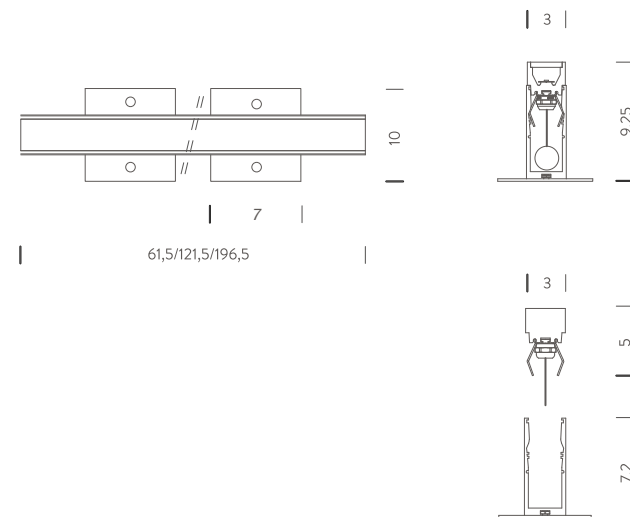

0,61M | 4000K

LAMPING

Source	LED strip
Total power	12W
Emission	asymmetric 45°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1144lm
Initial luminaire efficacy	95lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	61x3x9,25cm
Materials	aluminium
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load

Customization options
Accessories
Net lamp weight

body length
Drivers 24VDC + DALI interface,
1,75 kg

Codes

BWLK0206W52NAA

Structure


grey

PACKAGE

Package 01

Dimension: 52x3x9 cm / Gross weight: 1,75 kg

Certificazioni

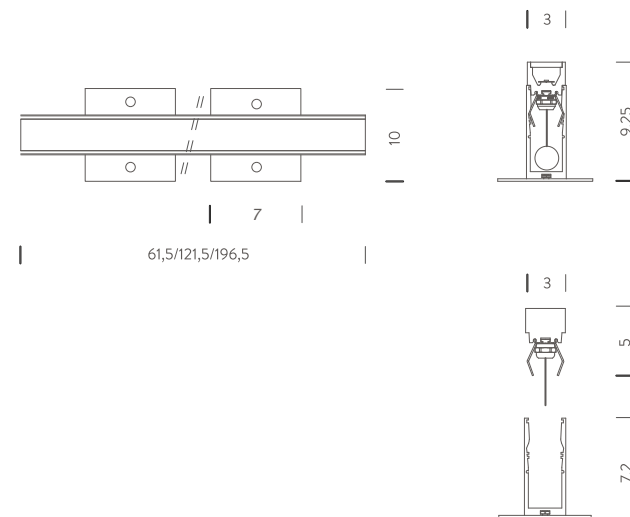

1,21M | 3000K

LAMPING

Source	LED strip
Total power	24W
Emission	asymmetric 45°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2060lm
Initial luminaire efficacy	86lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	121x3x9,25cm
Materials	aluminium
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load

Customization options
Accessories
Net lamp weight

body length
Drivers 24VDC + DALI interface,
3,5 kg

Codes

BWLK0209W52WAA

Structure


grey

PACKAGE

Package 01

Dimension: 103x3x9 cm / Gross weight: 3,5 kg

Certificazioni

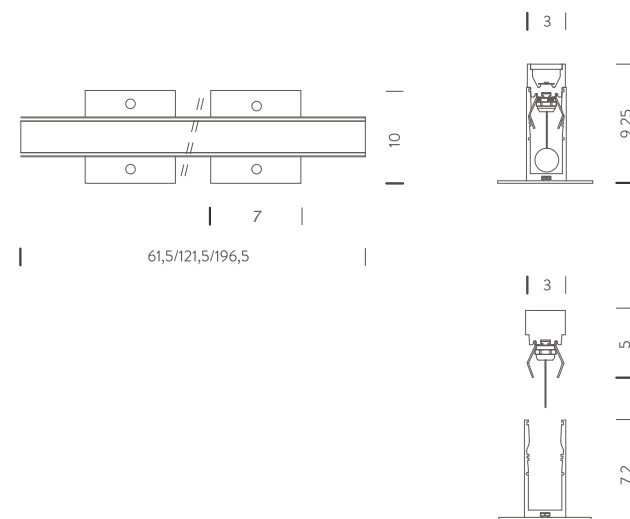

1,21M | 4000K

LAMPING

Source LED strip
Total power 24W
Emission asymmetric 45°
Switching according to driver
Tension 24VDC
Color temperature 4000K
Luminous flux 2288lm
Initial luminaire efficacy 95lm/W
Initial chromaticity SDCM<3
Typ CRI 90
IP class 67
Dimensions 121x3x9,25cm
Materials aluminium
Ambient temperature range -20°C / +35°C
Performance ambient temperature 25°C
Mechanical impact protection code IK10
Notes driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load
body length
Accessories Drivers 24VDC + DALI interface,
Net lamp weight 3,5 kg

Codes

BWLK0209W52NAA

PACKAGE

Package 01

Certificazioni




LED strip
24W
asymmetric 45°
according to driver
24VDC
4000K
2288lm
95lm/W
SDCM<3
90
67
121x3x9,25cm
aluminium
-20°C / +35°C
25°C
IK10
driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load
body length
Drivers 24VDC + DALI interface,
3,5 kg

Structure

grey

Dimension: 103x3x9 cm / Gross weight: 3,5 kg

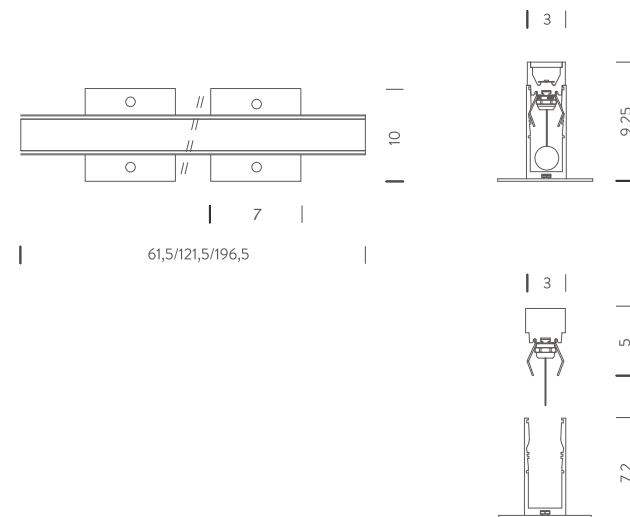

1,96M | 3000K

LAMPING

Source	LED strip
Total power	40W
Emission	asymmetric 45°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	3433lm
Initial luminaire efficacy	86lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	196x3x9,25cm
Materials	aluminium
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	

Customization options
Accessories
Net lamp weight

driver not included, cable length 1m, certified
500kg static load, 3500kg dynamic load
body length
Drivers 24VDC + DALI interface,
7 kg

Codes

BWLK0220W52WAA

Structure


grey

PACKAGE

Package 01

Dimension: 200x3x9 cm / Gross weight: 7 kg

Certificazioni

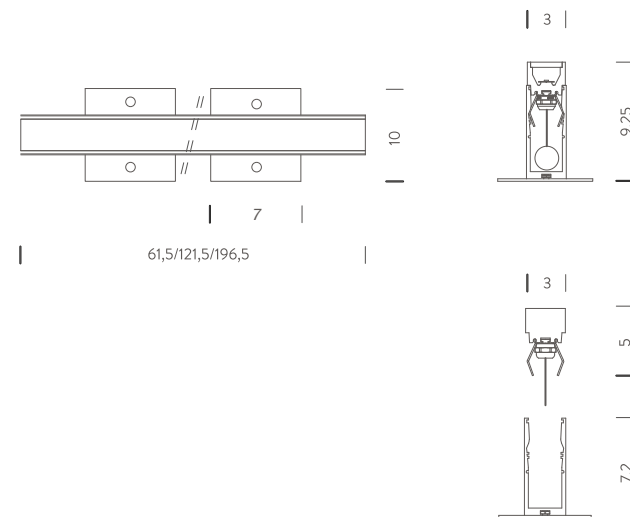

1,96M | 4000K

LAMPING

Source LED strip
Total power 40W
Emission asymmetric 45°
Switching according to driver
Tension 24VDC
Color temperature 4000K
Luminous flux 3815lm
Initial luminaire efficacy 95lm/W
Initial chromaticity SDCM<3
Typ CRI 90
IP class 67
Dimensions 196x3x9,25cm
Materials aluminium
Ambient temperature range -20°C / +35°C
Performance ambient temperature 25°C
Mechanical impact protection code IK10
Notes driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load
body length
Customization options Drivers 24VDC + DALI interface,
Accessories 7 kg
Net lamp weight

Codes

BWLK0220W52NAA

PACKAGE

Package 01

Certificazioni



LED strip
40W
asymmetric 45°
according to driver
24VDC
4000K
3815lm
95lm/W
SDCM<3
90
67
196x3x9,25cm
aluminium
-20°C / +35°C
25°C
IK10
driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load
body length
Drivers 24VDC + DALI interface,
7 kg

Structure

grey

Dimension: 200x3x9 cm / Gross weight: 7 kg

