

ZIRKOL CIRCLE

ZIRKOL C è una famiglia di lampade circolari a sospensione ideale per l'illuminazione generale e decorativa di ambienti.

Corpo in alluminio anodizzato e schermo di protezione opale per un'illuminazione omogenea.

L'emissione di luce può essere diretta o bi-emissione con alto flusso luminoso e con tre differenti temperature colore.

Driver remoto e dimmer interface inclusi.



HOME Ø 0,85M | DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	35W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2000lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 x driver 75W (110/240V) 1 x dimmer CASAMBI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg


Codes

BZRC1608G15DBO
BZRC1608G15DNE
BZRC1608G15DOR

PACKAGE

Package 01 Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni

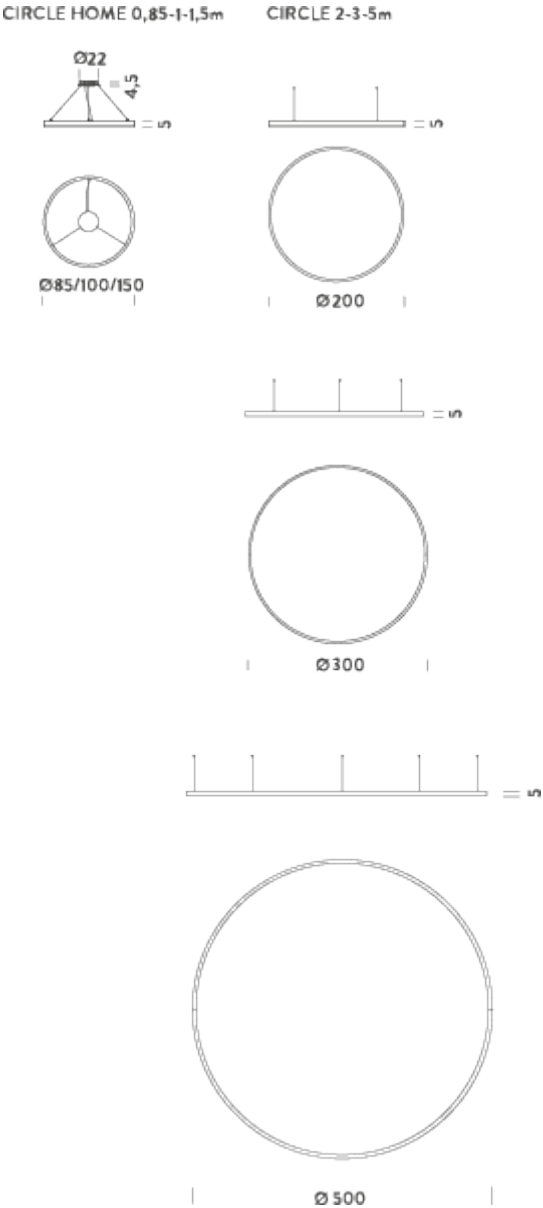

HOME Ø 0,85M | DOWNLIGHT - 2700K - TRIAC

LAMPING

Source	strip LED
Total power	35W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	2700K
Luminous flux	2000lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC2708G15DBO
BZRC2708G15DNE
BZRC2708G15DOR

PACKAGE

Package 01

Certificazioni




Structure




white
black

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

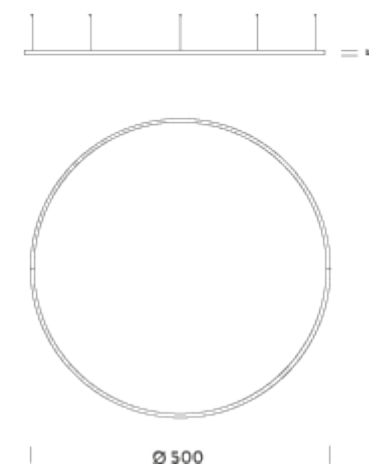

HOME Ø 0,85M | DOWNLIGHT - 2700K - CASAMBI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

strip LED
35W
diffused orientable
CASAMBI
24V
2700K
2000lm
57lm/W
SDCM<3
90
40
ø85x5cm
aluminium
0°C / +35°C
25°C
included: round canopy with 1 driver 75W
(110/240V) | 1 dimmer CASAMBI | 1 electrical cable
4m | 3x adjustable metal cables (length from 3m to
0,5m) | ceiling attachment included | RAL 9005
black, RAL 9016 white | Shipped assembled
light configurations, separate light control, control
systems
3 kg

Customization options

Net lamp weight

Codes

BZRC3308G15DBO
BZRC3308G15DNE
BZRC3308G15DOR

PACKAGE

Package 01

Certificazioni




Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

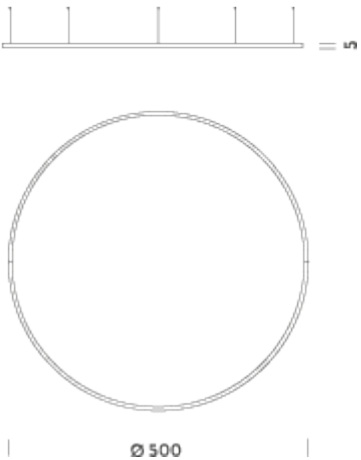

HOME Ø 0,85M | UP-DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	70W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	4000lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black RAL 9016 white shipped assembled

Customization options

Energy class	E
Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1708G15DBO
BZRC1708G15DNE
BZRC1708G15DOR

Structure

white
black
gold


PACKAGE

Package 01	Dimension: 115x115x12 cm / Gross weight: 5,5 kg
------------	---




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

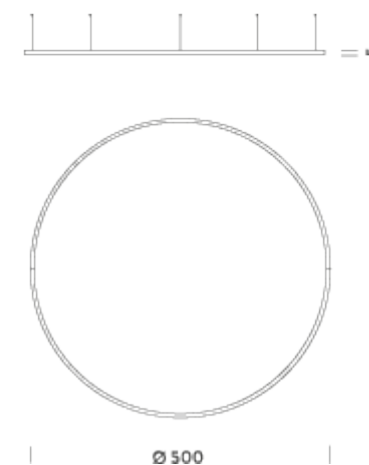

HOME Ø 0,85M | UP-DOWNLIGHT - 2700K - TRIAC

LAMPING

Source	strip LED
Total power	70W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	2700K
Luminous flux	4000lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC2808G15DBO
BZRC2808G15DNE
BZRC2808G15DOR

PACKAGE

Package 01

Certificazioni




strip LED
70W
diffused orientable
TRIAC
24V
2700K
4000lm
57lm/W
SDCM<3
90
40
ø85x5cm
aluminium
0°C / +35°C
25°C
included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled
light configurations, separate light control, control systems
3 kg

Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

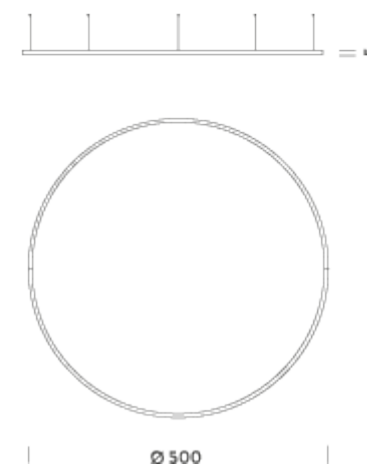

HOME Ø 0,85M | UP-DOWNLIGHT - 2700K - CASAMBI

LAMPING

Source	strip LED
Total power	70W
Emission	diffused orientable
Switching	CASAMBI
Tension	24V
Color temperature	2700K
Luminous flux	4000lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 dimmer CASAMBI 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC3408G15NBO
BZRC3408G15NNE
BZRC3408G15NOR

PACKAGE

Package 01

Certificazioni




Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

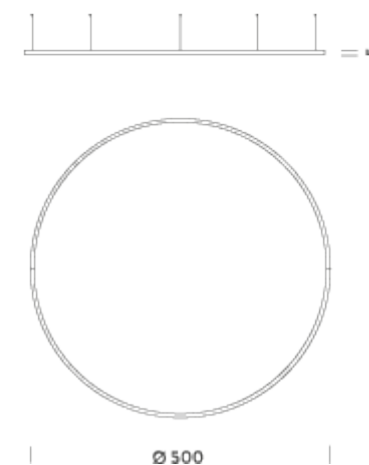

HOME Ø 0,85M | DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	35W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2200lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 x driver 75W (110/240V) 1 x dimmer CASAMBI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included RAL 9005 black RAL 9016 white shipped assembled

Customization options

Energy class	E
Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1608G15WBO
BZRC1608G15WNE
BZRC1608G15WOR

Structure

white
black
gold


PACKAGE

Package 01 Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

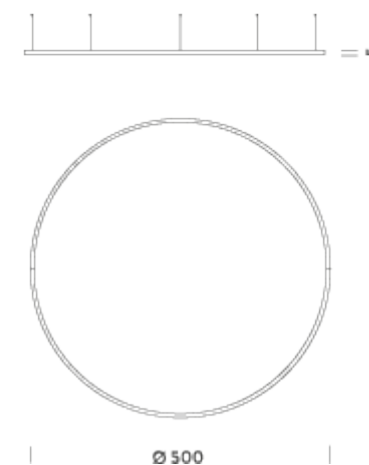

HOME Ø 0,85M | DOWNLIGHT - 3000K - TRIAC

LAMPING

Source	strip LED
Total power	35W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	3000K
Luminous flux	2200lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

light configurations, separate light control, control systems
3 kg

Codes

BZRC2708G15WBO
BZRC2708G15WNE
BZRC2708G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

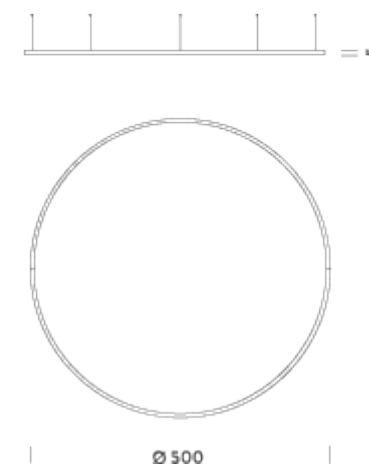

HOME Ø 0,85M | DOWNLIGHT - 3000K - CASAMBI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

strip LED
35W
diffused orientable
CASAMBI
24V
3000K
2200lm
63lm/W
SDCM<3
90
40
ø85x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 driver 75W
(110/240V) | 1 dimmer CASAMBI | 1 electrical cable
4m | 3x adjustable metal cables (length from 3m to
0,5m) | ceiling attachment included | RAL 9005
black, RAL 9016 white | Shipped assembled

Customization options

light configurations, separate light control, control
systems

Net lamp weight

3 kg

Codes

BZRC3308G15WBO
BZRC3308G15WNE
BZRC3308G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

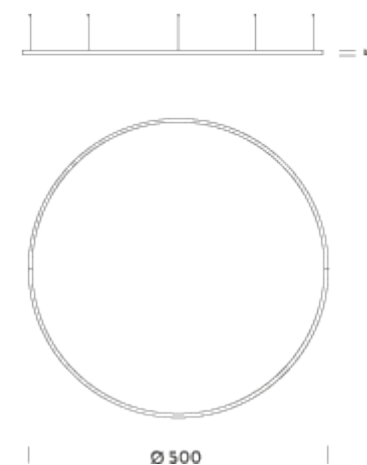

HOME Ø 0,85M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
70W
diffused orientable
DALI
24V
3000K
4400lm
63lm/W
SDCM<3
90
40
ø85x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 75W
(110/240V) | 1 x dimmer DALI | 1 x electrical cable
4m | 3 x adjustable metal cables (length from 3m to
0,5m) ceiling attachment included | RAL 9005
black | RAL 9016 white | shipped assembled

Customization options

light configurations, separate light control, control
systems

Energy class

E

Accessories

Net lamp weight

Canopy, for concrete ceiling
3 kg

Codes

BZRC1708G15WBO
BZRC1708G15WNE
BZRC1708G15WOR

Structure

white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni







ILTI LUCE

www.iltiluce.com

CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

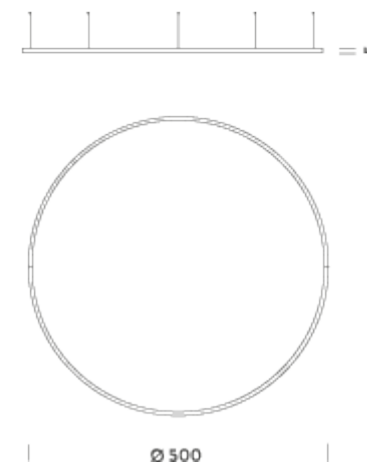

HOME Ø 0,85M | UP-DOWNLIGHT - 3000K - TRIAC

LAMPING

Source	strip LED
Total power	70W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	3000K
Luminous flux	4400lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC2808G15WBO
BZRC2808G15WNE
BZRC2808G15WOR

PACKAGE

Package 01

Certificazioni




Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

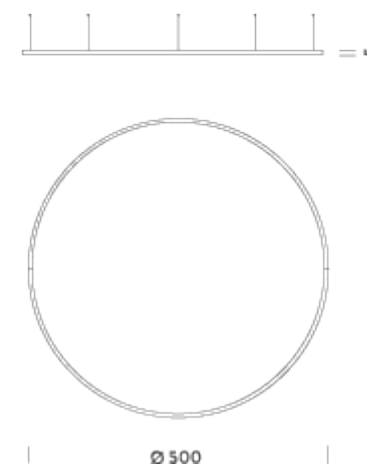

HOME Ø 0,85M | UP-DOWNLIGHT - 3000K - CASAMBI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

strip LED
70W
diffused orientable
CASAMBI
24V
3000K
4400lm
63lm/W
SDCM<3
90
40
ø85x5cm
aluminium
0°C / +35°C
25°C
included: round canopy with 1 driver 75W
(110/240V) | 1 dimmer CASAMBI | 1 electrical cable
4m | 3x adjustable metal cables (length from 3m to
0,5m) | ceiling attachment included | RAL 9005
black, RAL 9016 white | Shipped assembled
light configurations, separate light control, control
systems
3 kg

Customization options

Net lamp weight

Codes

BZRC3408G15WBO
BZRC3408G15WNE
BZRC3408G15WOR

PACKAGE

Package 01

Structure


white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

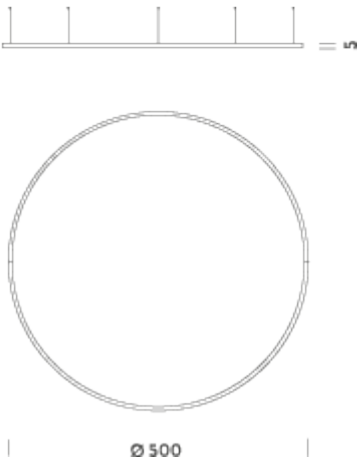

HOME Ø 0,85M | DOWNLIGHT - 4000K - DALI

LAMPING

Source	LED strip
Total power	35W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	2360lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	light configurations, separate light control, control systems

Notes

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer CASAMBI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included | RAL 9005 black | RAL 9016 white | shipped assembled
optional accessories and custom features

Customization options

Energy class

Accessories

Net lamp weight

D

Canopy, for concrete ceiling

3 kg

Codes

BZRC1608G15NBO

BZRC1608G15NNE

BZRC1608G15NOR

Structure

white

black

gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

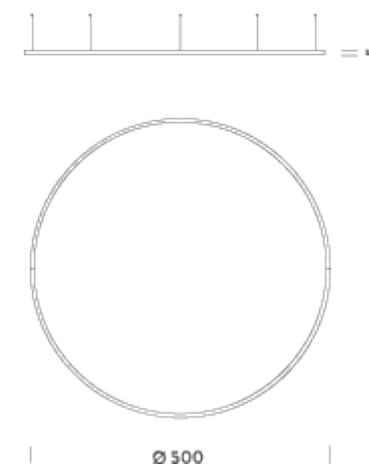

HOME Ø 0,85M | DOWNLIGHT - 4000K - TRIAC

LAMPING

Source	strip LED
Total power	35W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	4000K
Luminous flux	2360lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC2708G15NBO
BZRC2708G15NNE
BZRC2708G15NOR

PACKAGE

Package 01

Certificazioni




Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

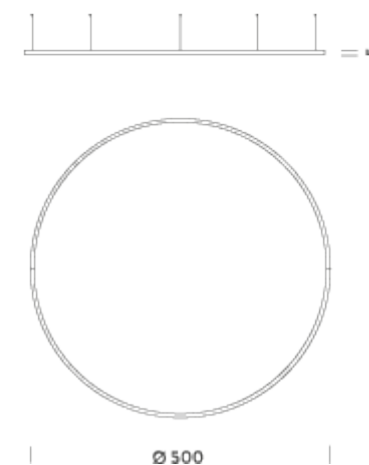

HOME Ø 0,85M | DOWNLIGHT - 4000K - CASAMBI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

strip LED
35W
diffused orientable
CASAMBI
24V
4000K
2360lm
67lm/W
SDCM<3
90
40
ø85x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 driver 75W
(110/240V) | 1 dimmer CASAMBI | 1 electrical cable
4m | 3x adjustable metal cables (length from 3m to
0,5m) | ceiling attachment included | RAL 9005
black, RAL 9016 white | Shipped assembled

Customization options

light configurations, separate light control, control
systems

Net lamp weight

3 kg

Codes

BZRC3308G15NBO
BZRC3308G15NNE
BZRC3308G15NOR

Structure

white
black
gold

PACKAGE

Package 01





Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

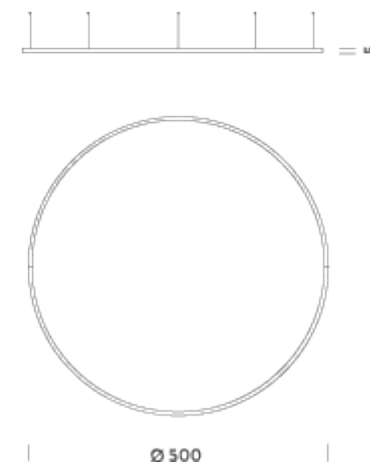

HOME Ø 0,85M | UP-DOWNLIGHT - 4000K - DALI

LAMPING

Source	LED strip
Total power	70W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	4720lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black RAL 9016 white shipped assembled

Customization options

Energy class	D
Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1708G15NBO
BZRC1708G15NNE
BZRC1708G15NOR

Structure

white
black
gold


PACKAGE

Package 01	Dimension: 115x115x12 cm / Gross weight: 5,5 kg
------------	---




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

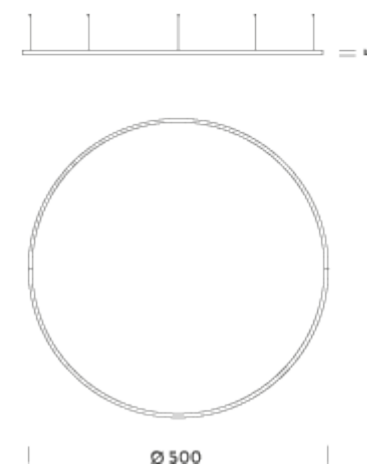

HOME Ø 0,85M | UP-DOWNLIGHT - 4000K - TRIAC

LAMPING

Source	strip LED
Total power	70W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	4000K
Luminous flux	4720lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC2808G15NBO
BZRC2808G15NNE
BZRC2808G15NOR

PACKAGE

Package 01

Certificazioni




Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

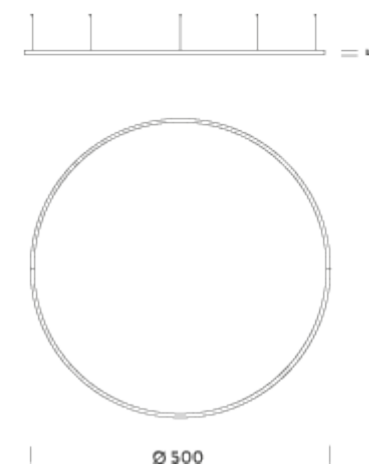

HOME Ø 0,85M | UP-DOWNLIGHT - 4000K - CASAMBI

LAMPING

Source	strip LED
Total power	70W
Emission	diffused orientable
Switching	CASAMBI
Tension	24V
Color temperature	4000K
Luminous flux	4720lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 dimmer CASAMBI 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC3408G15NBO
BZRC3408G15NNE
BZRC3408G15NOR

PACKAGE

Package 01

Certificazioni



included: round canopy with 1 driver 75W (110/240V) | 1 dimmer CASAMBI | 1 electrical cable 4m | 3x adjustable metal cables (length from 3m to 0,5m) | ceiling attachment included | RAL 9005 black, RAL 9016 white | Shipped assembled

light configurations, separate light control, control systems


3 kg

Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

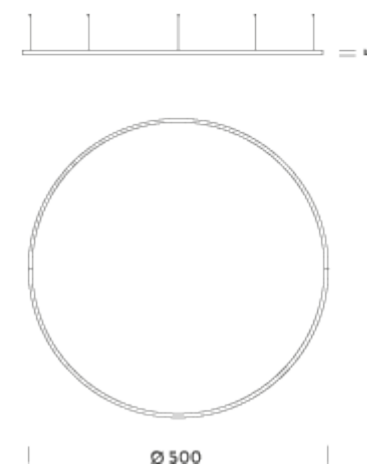

HOME Ø 1M | DOWNLIGHT - 2700K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
45W
Diffused orientable
DALI
24V
2700K
2616lm
58lm/W
SDCM<3
90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

3 kg

Codes

BZRC1610G15DBO
BZRC1610G15DNE
BZRC1610G15DOR

Structure

white
black
gold

PACKAGE

Package 01





Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

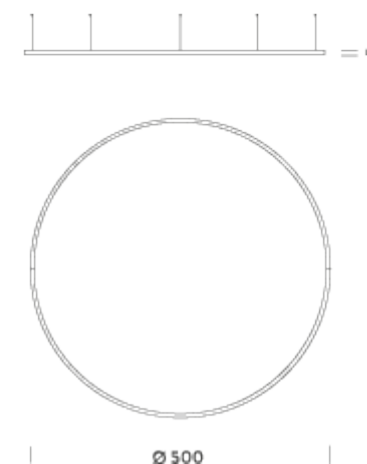

HOME Ø 1M | DOWNLIGHT - 2700K - TRIAC

LAMPING

Source	strip LED
Total power	45W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	2700K
Luminous flux	2616lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC2710G15DBO
BZRC2710G15DNE
BZRC2710G15DOR

PACKAGE

Package 01

Certificazioni




light configurations, separate light control, control systems
3 kg

Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

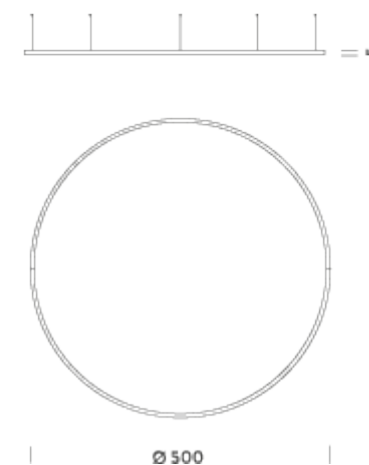

HOME Ø 1M | DOWNLIGHT - 2700K - CASAMBI

LAMPING

Source	strip LED
Total power	45W
Emission	diffused orientable
Switching	CASAMBI
Tension	24V
Color temperature	2700K
Luminous flux	2616lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

Net lamp weight

Codes

BZRC3310G15DBO
BZRC3310G15DNE
BZRC3310G15DOR

PACKAGE

Package 01

Certificazioni



included: round canopy with 1 driver 75W (110/240V) | 1 dimmer CASAMBI | 1x electrical cable 4m | 3x adjustable metal cables (length from 3m to 0,5m) | ceiling attachment included | RAL 9005 black, RAL 9016 white | Shipped assembled
light configurations, separate light control, control systems


3 kg

Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

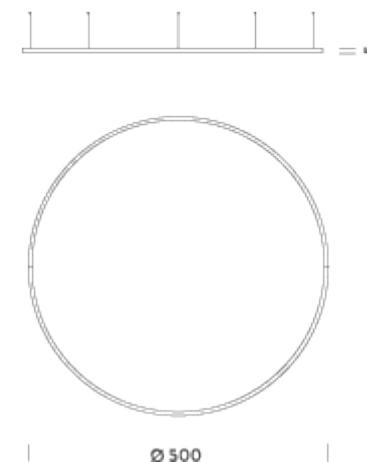

HOME Ø 1M | UP-DOWNLIGHT - 2700K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
90W
Diffused orientable
DALI
24V
2700K
5231lm
58lm/W
SDCM<3
90
40
ø100x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 100W (110-240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

Light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

Codes

BZRC1710G15DBO
BZRC1710G15DNE
BZRC1710G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

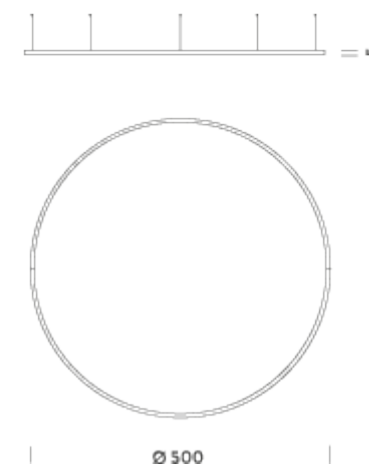

HOME Ø 1M | UP-DOWNLIGHT - 2700K - TRIAC

LAMPING

Source	strip LED
Total power	90W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	2700K
Luminous flux	5231lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC2810G15DBO
BZRC2810G15DNE
BZRC2810G15DOR

PACKAGE

Package 01

Certificazioni




strip LED
90W
diffused orientable
TRIAC
24V
2700K
5231lm
58lm/W
SDCM<3
90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C
included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled
Light configurations, separate light control, control systems
4 kg

Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

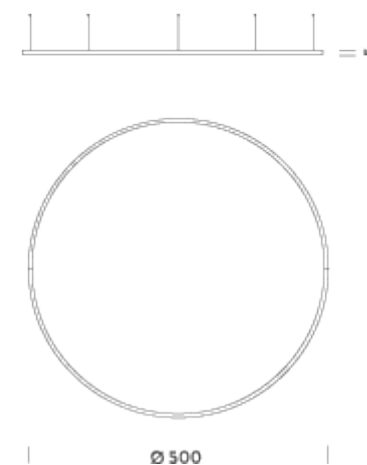

HOME Ø 1M | UP-DOWNLIGHT - 2700K - CASAMBI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

strip LED
90W
diffused orientable
CASAMBI
24V
2700K
5231lm
58lm/W
SDCM<3
90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 driver 100W
(110/240V) | 1 dimmer CASAMBI | 1x electrical
cable 4m | 3x adjustable metal cables (length from
3m to 0,5m) | ceiling attachment included | RAL
9005 black, RAL 9016 white | Shipped assembled

Customization options

Light configurations, separate light control, control
systems

Net lamp weight

4 kg

Codes

BZRC3410G15DBO
BZRC3410G15DNE
BZRC3410G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

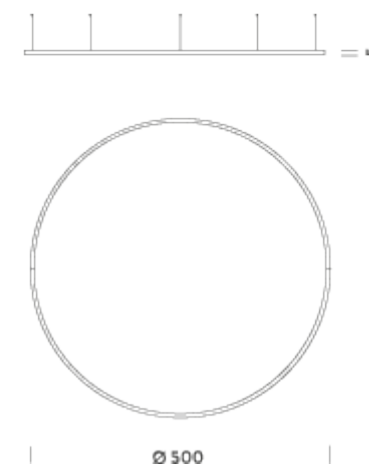

HOME Ø 1M | DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	45W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled

Customization options

Energy class

Accessories

Net lamp weight

Codes

BZRC1610G15WBO
BZRC1610G15WNE
BZRC1610G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

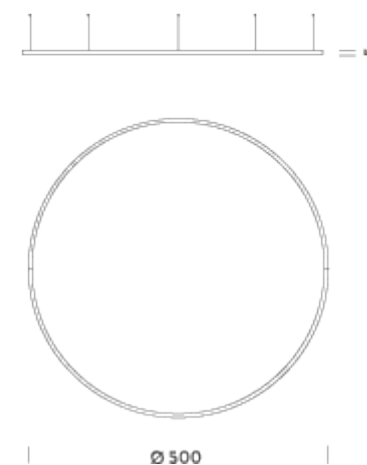

HOME Ø 1M | DOWNLIGHT - 3000K - TRIAC

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

strip LED
45W
diffused orientable
TRIAC
24V
3000K
2769lm
62lm/W
SDCM<3
90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 driver 75W
(110/240V) | 1 electrical cable 4m | 3x adjustable
metal cables (length from 3m to 0,5m) | ceiling
attachment included | RAL 9005 black, RAL 9016
white | Shipped assembled

Customization options

Light configurations, separate light control, control
systems

Net lamp weight

3 kg

Codes

BZRC2710G15WBO
BZRC2710G15WNE
BZRC2710G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

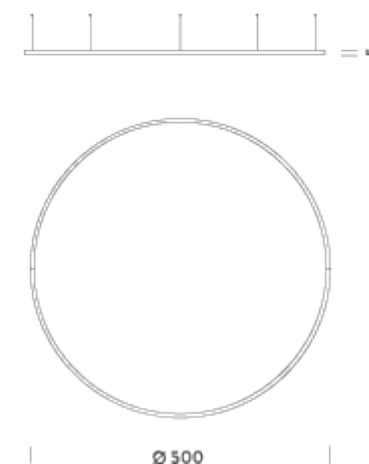

HOME Ø 1M | DOWNLIGHT - 3000K - CASAMBI

LAMPING

Source	strip LED
Total power	45W
Emission	diffused orientable
Switching	CASAMBI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 dimmer CASAMBI 1x electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC3310G15WBO
BZRC3310G15WNE
BZRC3310G15WOR

PACKAGE

Package 01

Certificazioni




Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

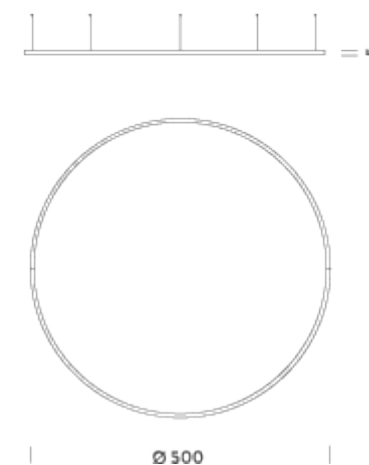

HOME Ø 1M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
90W
Diffused orientable
DALI
24V
3000K
5539lm
62lm/W
SDCM<3
90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 100W (110-240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

Light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

Codes

BZRC1710G15WBO
BZRC1710G15WNE
BZRC1710G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

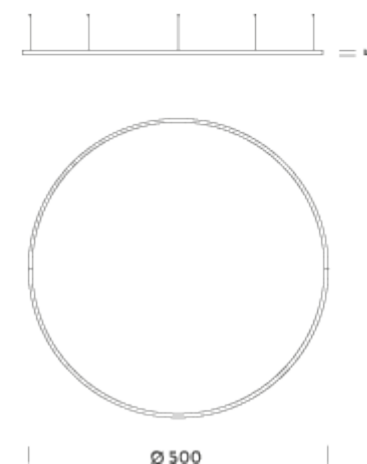

HOME Ø 1M | UP-DOWNLIGHT - 3000K - TRIAC

LAMPING

Source	strip LED
Total power	90W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	3000K
Luminous flux	5539lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC2810G15WBO
BZRC2810G15WNE
BZRC2810G15WOR

PACKAGE

Package 01

Certificazioni




Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

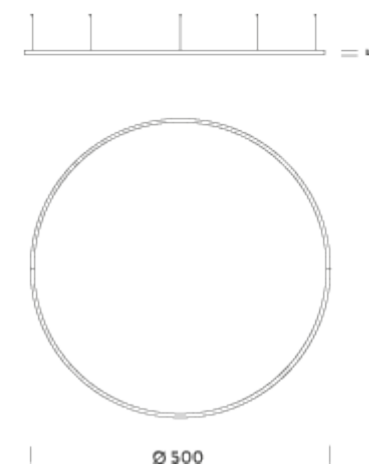

HOME Ø 1M | UP-DOWNLIGHT - 3000K - CASAMBI

LAMPING

Source	strip LED
Total power	90W
Emission	diffused orientable
Switching	CASAMBI
Tension	24V
Color temperature	3000K
Luminous flux	5539lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 100W (110/240V) 1 dimmer CASAMBI 1x electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC3410G15WBO
BZRC3410G15WNE
BZRC3410G15WOR

PACKAGE

Package 01

Certificazioni




Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

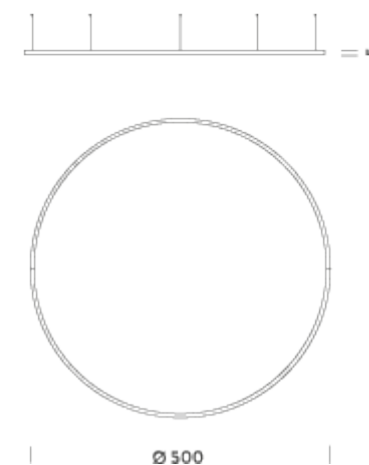

HOME Ø 1M | DOWNLIGHT - 4000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
45W
Diffused orientable
DALI
24V
4000K
3077lm
68lm/W
SDCM<3
90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 75W
(110/240V) | 1 x dimmer DALI | 1 x electrical cable
4m | 3 x adjustable metal cable (length from 3m to
0,5m) ceiling attachment | RAL 9005 black | RAL
9016 white | shipped assembled

Customization options

Light configurations, separate light control, control
systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Ceiling attachment,
for metal cable | Ceiling plate, for false ceiling

Net lamp weight

3 kg

Codes

BZRC1610G15NBO
BZRC1610G15NNE
BZRC1610G15NOR

Structure

white
black
gold

PACKAGE

Package 01





Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

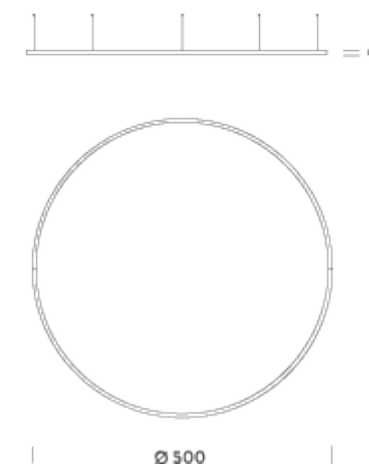

HOME Ø 1M | DOWNLIGHT - 4000K - TRIAC

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

strip LED
45W
diffused orientable
TRIAC
24V
4000K
3077lm
68lm/W
SDCM<3
90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C
included: round canopy with 1 driver 75W
(110/240V) | 1 electrical cable 4m | 3x adjustable
metal cables (length from 3m to 0,5m) | ceiling
attachment included | RAL 9005 black, RAL 9016
white | Shipped assembled

Customization options

Light configurations, separate light control, control
systems

Net lamp weight

3 kg

Codes

BZRC2710G15NBO
BZRC2710G15NNE
BZRC2710G15NOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

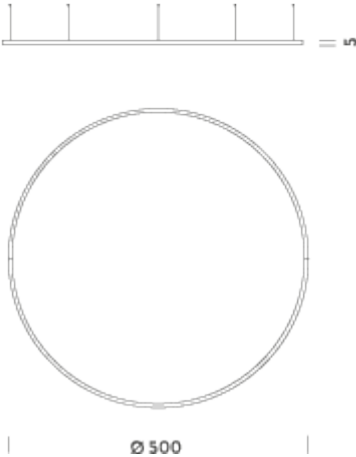

HOME Ø 1M | DOWNLIGHT - 4000K - CASAMBI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

strip LED
45W
diffused orientable
CASAMBI
24V
4000K
3077lm
68lm/W
SDCM<3
90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 driver 75W
(110/240V) | 1 dimmer CASAMBI | 1x electrical
cable 4m | 3x adjustable metal cables (length from
3m to 0,5m) | ceiling attachment included | RAL
9005 black, RAL 9016 white | Shipped assembled

Customization options

Light configurations, separate light control, control
systems

Net lamp weight

3 kg

Codes

BZRC3310G15NBO
BZRC3310G15NNE
BZRC3310G15NOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

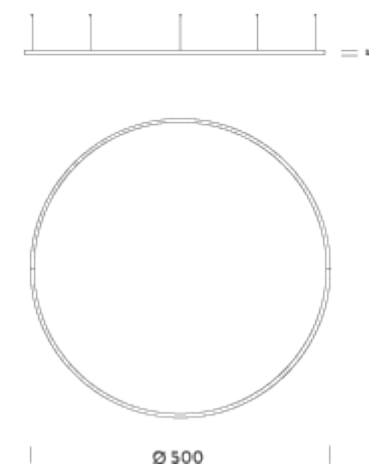

HOME Ø 1M | UP-DOWNLIGHT - 4000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
90W
Diffused orientable
DALI
24V
4000K
6154lm
68lm/W
SDCM<3
90
40
Ø100x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 100W (110-240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

Light configurations, separate light control, control systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

Codes

BZRC1710G15NBO
BZRC1710G15NNE
BZRC1710G15NOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

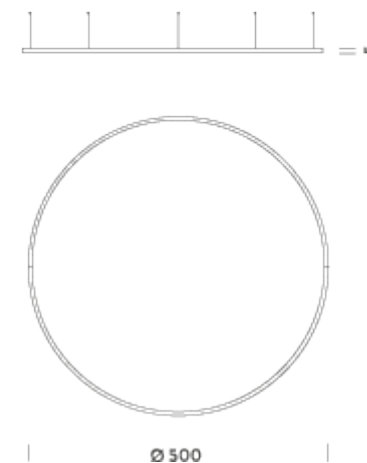

HOME Ø 1M | UP-DOWNLIGHT - 4000K - TRIAC

LAMPING

Source	strip LED
Total power	90W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	4000K
Luminous flux	6154lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 75W (110/240V) 1 electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC2810G15NBO
BZRC2810G15NNE
BZRC2810G15NOR

PACKAGE

Package 01

Certificazioni




Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

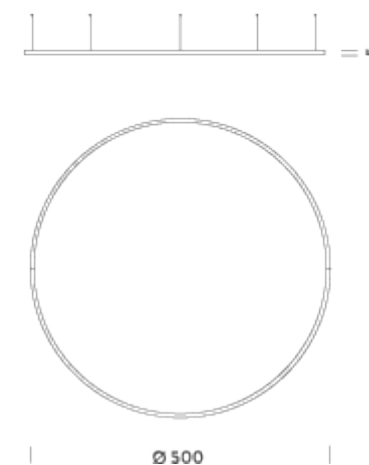

HOME Ø 1M | UP-DOWNLIGHT - 4000K - CASAMBI

LAMPING

Source	strip LED
Total power	90W
Emission	diffused orientable
Switching	CASAMBI
Tension	24V
Color temperature	4000K
Luminous flux	6154lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 driver 100W (110/240V) 1 dimmer CASAMBI 1x electrical cable 4m 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black, RAL 9016 white Shipped assembled

Customization options

Net lamp weight

Codes

BZRC3410G15NBO
BZRC3410G15NNE
BZRC3410G15NOR

PACKAGE

Package 01

Certificazioni




Structure




white
black
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

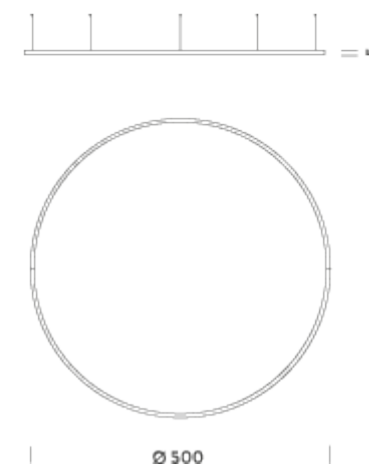

HOME Ø 1,5M | DOWNLIGHT - 2700K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
68W
Diffused orientable
DALI
24V
2700K
3923lm
57lm/W
SDCM<3
90
40
Ø150x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 75W
(110/24V) | 1 x dimmer DALI | 1 x electrical cable
4m | 3 x adjustable metal cable (length from 3m to
0,5m) ceiling attachment | RAL 9005 black | RAL
9016 white | shipped assembled

Customization options

light configurations, separate light control, control
systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment,
for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

Codes

BZRC1615G15DBO
BZRC1615G15DNE
BZRC1615G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 7,9 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

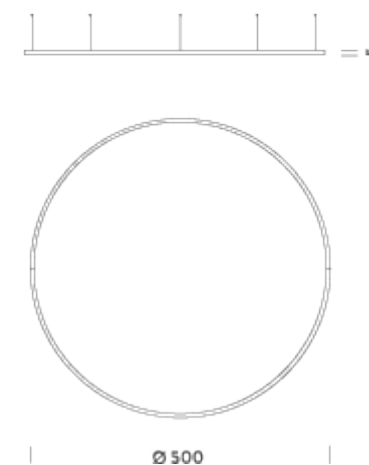

HOME Ø 1,5M | UP-DOWNLIGHT - 2700K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
136W
Diffused orientable
DALI
24V
2700K
7847lm
58lm/W
SDCM<3
90
40
Ø150x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 150W (220/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

5,4 kg

Codes

BZRC1715G15DBO
BZRC1715G15DNE
BZRC1715G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

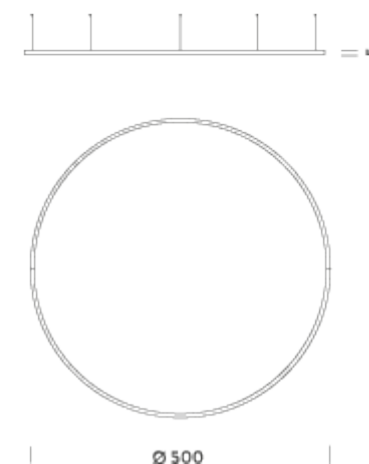

HOME Ø 1,5M | DOWNLIGHT - 3000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
68W
Diffused orientable
DALI
24V
3000K
4154lm
61lm/W
SDCM<3
90
40
Ø150x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 75W
(110/24V) | 1 x dimmer DALI | 1 x electrical cable
4m | 3 x adjustable metal cable (length from 3m to
0,5m) ceiling attachment | RAL 9005 black | RAL
9016 white | shipped assembled

Customization options

light configurations, separate light control, control
systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment,
for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

Codes

BZRC1615G15WBO
BZRC1615G15WNE
BZRC1615G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 7,9 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

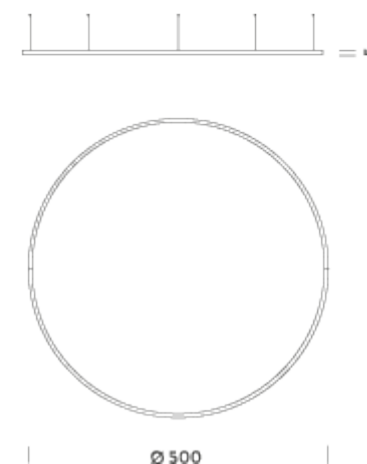

HOME Ø 1,5M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
136W
Diffused orientable
DALI
24V
3000K
8308lm
61lm/W
SDCM<3
90
40
Ø150x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 150W (220/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

5,4 kg

Codes

BZRC1715G15WBO
BZRC1715G15WNE
BZRC1715G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

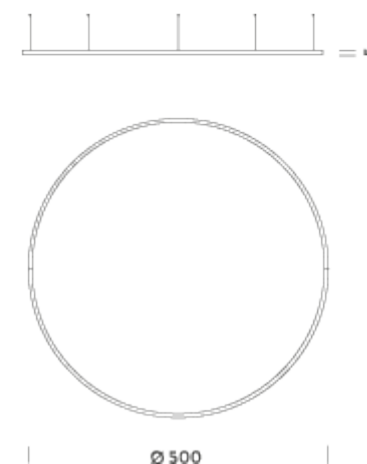

HOME Ø 1,5M | DOWNLIGHT - 4000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
68W
Diffused orientable
DALI
24V
4000K
4616lm
68lm/W
SDCM<3
90
40
Ø150x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 75W
(110/24V) | 1 x dimmer DALI | 1 x electrical cable
4m | 3 x adjustable metal cable (length from 3m to
0,5m) ceiling attachment | RAL 9005 black | RAL
9016 white | shipped assembled

Customization options

light configurations, separate light control, control
systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Ceiling attachment,
for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

Codes

BZRC1615G15NBO
BZRC1615G15NNE
BZRC1615G15NOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 7,9 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

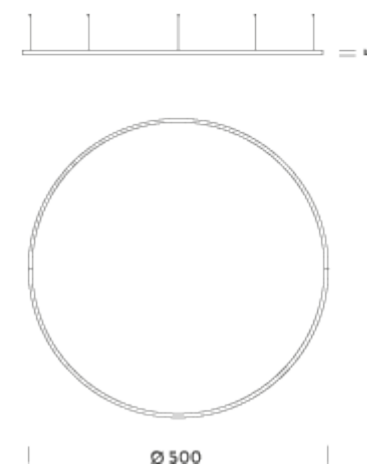

HOME Ø 1,5M | UP-DOWNLIGHT - 4000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
136W
Diffused orientable
DALI
24V
4000K
9232lm
68lm/W
SDCM<3
90
40
Ø150x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 150W (220/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

light configurations, separate light control, control systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

5,4 kg

Codes

BZRC1715G15NBO
BZRC1715G15NNE
BZRC1715G15NOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

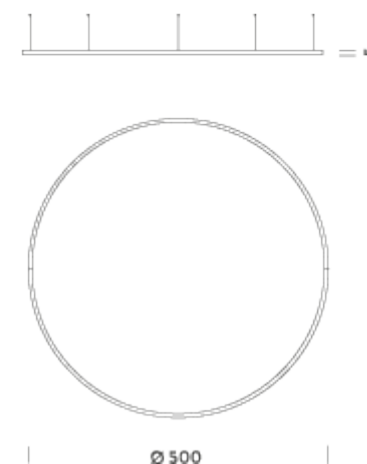

Ø 2M | DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	90W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	5260lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø200x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

7 kg

Codes

BZRC1620G15DBO
BZRC1620G15DNE
BZRC1620G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,4 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

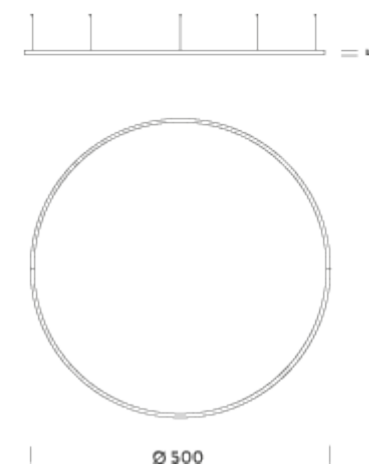

Ø 2M | UP-DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	180W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	10500lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø200x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

Net lamp weight

7,2 kg

Codes

BZRC1720G15DBO
BZRC1720G15DNE
BZRC1720G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,6 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

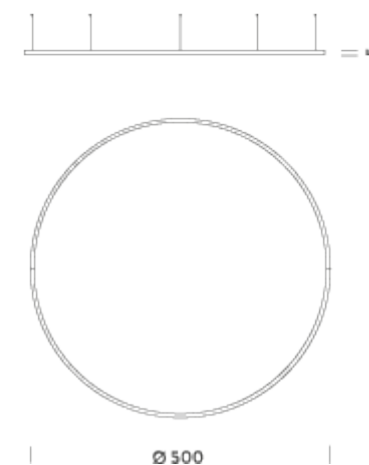

Ø 2M | DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	90W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	5539lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø200x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

7 kg

Codes

BZRC1620G15WBO
BZRC1620G15WNE
BZRC1620G15WOR

Structure

white
black
matte gold

PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,4 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

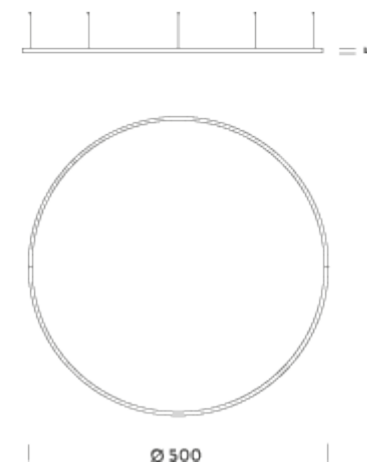

Ø 2M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
180W
Diffused orientable
DALI
24V
3000K
11078lm
62lm/W
SDCM<3
90
40
ø200x5cm
aluminium
0°C / +35°C
25°C

included: 1 x driver 250W (220/240V) | 1 x dimmer
DALI | 2 x electrical cable 5m | 4 x adjustable metal
cable length 3m, ceiling attachment | remote driver
| RAL 9005 black | RAL 9016 white | shipped in 2
pieces

Customization options

light configurations, separate light control, control
systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1
driver, 2 electrical cables | Ceiling plate, for false
ceiling

Net lamp weight

7,2 kg

Codes

BZRC1720G15WBO
BZRC1720G15WNE
BZRC1720G15WOR

Structure

white
black
gold

PACKAGE

Package 01





Dimension: 210x110x15 cm / Gross weight: 12,6 kg

Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

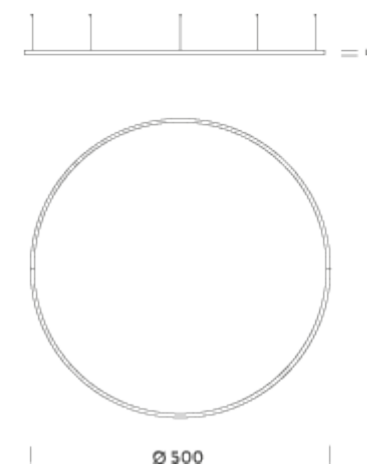

Ø 2M | DOWNLIGHT - 4000K - DALI

LAMPING

Source	LED strip
Total power	90W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	6154lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø200x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces

Customization options

light configurations, separate light control, control systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

7 kg

Codes

BZRC1620G15NBO
BZRC1620G15NNE
BZRC1620G15NOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,4 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

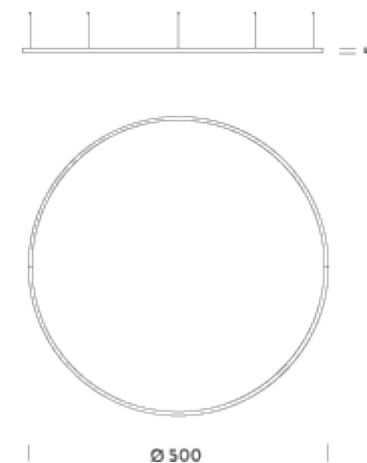

Ø 2M | UP-DOWNLIGHT - 4000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
180W
Diffused orientable
DALI
24V
4000K
12309lm
68lm/W
SDCM<3
90
40
ø200x5cm
aluminium
0°C / +35°C
25°C

included: 1 x driver 250W (220/240V) | 1 x dimmer
DALI | 2 x electrical cable 5m | 4 x adjustable metal
cable length 3m, ceiling attachment | remote driver
| RAL 9005 black | RAL 9016 white | shipped in 2
pieces

Customization options

light configurations, separate light control, control
systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Canopy box, 1
driver, 2 electrical cables | Ceiling plate, for false
ceiling

Net lamp weight

7,2 kg

Codes

BZRC1720G15NBO
BZRC1720G15NNE
BZRC1720G15NOR

Structure

white
black
gold

PACKAGE

Package 01





Dimension: 210x110x15 cm / Gross weight: 12,6 kg

Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

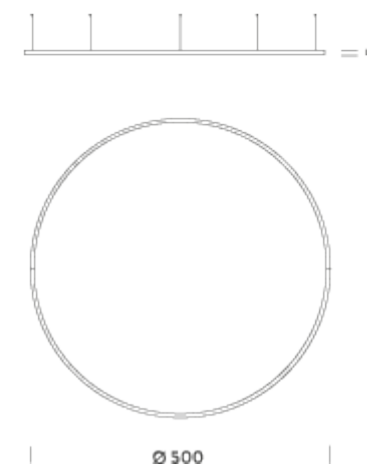

Ø 3M | DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	7820lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø300x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 6 x adjustable metal cable length 3m, ceiling attachment included remote driver RAL 9005 black RAL 9016 white shipped in 3 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling plate, for false ceiling

Net lamp weight

9,8 kg

Codes

BZRC1630G15DBO
BZRC1630G15DNE
BZRC1630G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 17,8 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

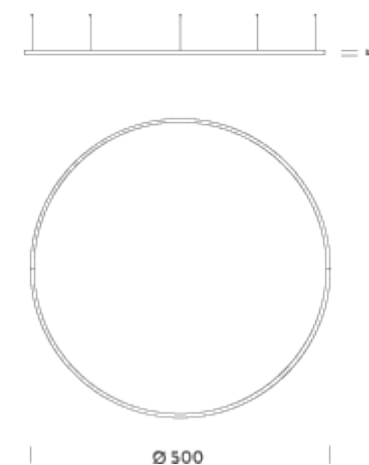

Ø 3M | UP-DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	15640lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø300x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 3 x drivers 100 (110/240V) 3 x dimmer DALI 3 x electrical cable 5m 6 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 3 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

12,3 kg

Codes

BZRC1730G15DBO
BZRC1730G15DNE
BZRC1730G15DOR

Structure

white
black
gold

PACKAGE

Package 01





Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

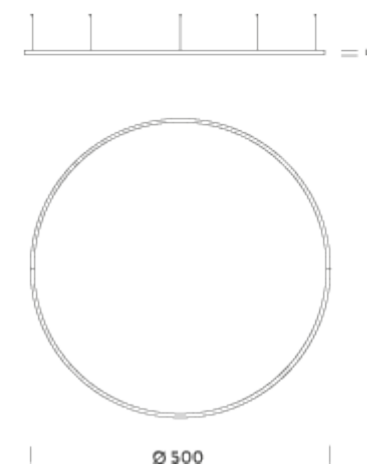

Ø 3M | DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	8238lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø300x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 6 x adjustable metal cable length 3m, ceiling attachment included remote driver RAL 9005 black RAL 9016 white shipped in 3 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling plate, for false ceiling

Net lamp weight

9,8 kg

Codes

BZRC1630G15WBO
BZRC1630G15WNE
BZRC1630G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 17,8 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

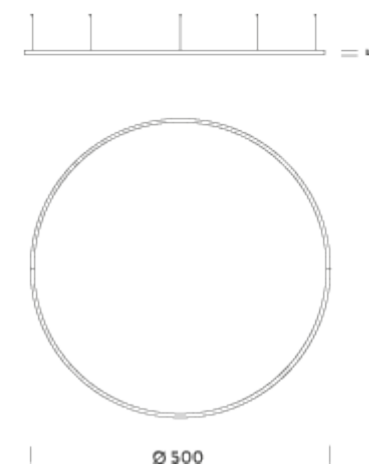

Ø 3M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	16476lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø300x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 3 x drivers 100 (110/240V) 3 x dimmer DALI 3 x electrical cable 5m 6 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 3 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

12,3 kg

Codes

BZRC1730G15WBO
BZRC1730G15WNE
BZRC1730G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

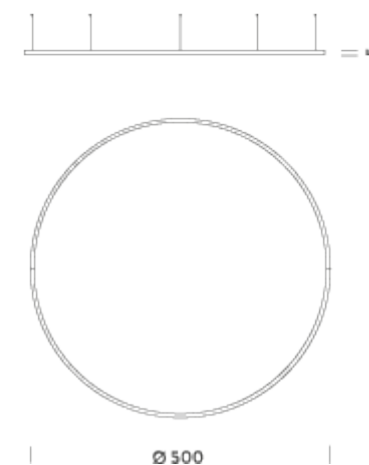

Ø 3M | DOWNLIGHT - 4000K - DALI

LAMPING

Source	LED strip
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	9153lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø300x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 6 x adjustable metal cable length 3m, ceiling attachment included remote driver RAL 9005 black RAL 9016 white shipped in 3 pieces

Customization options

light configurations, separate light control, control systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Ceiling plate, for false ceiling

Net lamp weight

9,8 kg

Codes

BZRC1630G15NBO
BZRC1630G15NNE
BZRC1630G15NOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 17,8 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

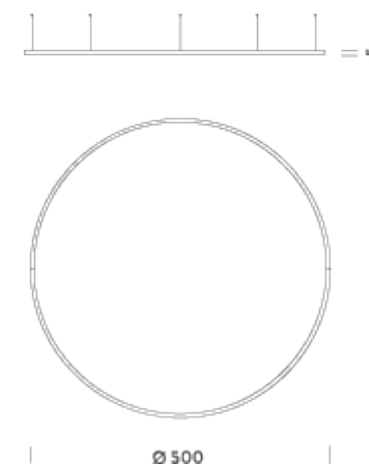

Ø 3M | UP-DOWNLIGHT - 4000K - DALI

LAMPING

Source	LED strip
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	18306lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø300x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 3 x drivers 100 (110/240V) 3 x dimmer DALI 3 x electrical cable 5m 6 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 3 pieces

Customization options

light configurations, separate light control, control systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

12,3 kg

Codes

BZRC1730G15NBO
BZRC1730G15NNE
BZRC1730G15NOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

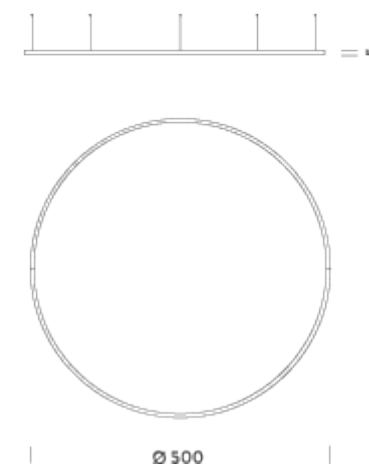

Ø 5M | DOWNLIGHT -2700K - DALI

LAMPING

Source	LED strip
Total power	226W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	13100lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø500x5cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 10 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 5 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

Net lamp weight

15,9 kg

Codes

BZRC1650G15DBO
BZRC1650G15DNE
BZRC1650G15DOR

Structure

white
black
gold

PACKAGE

Package 01





Dimension: 310x110x15 cm / Gross weight: 23,9 kg

Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

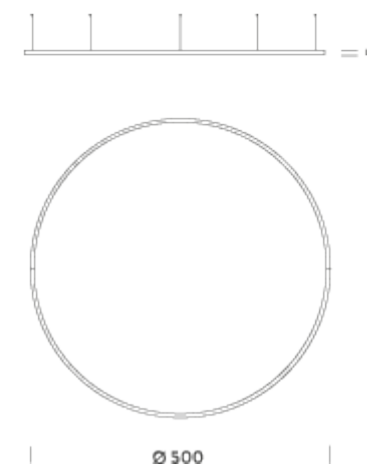

Ø 5M | UP-DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	452W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	26100lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø500x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 5 x driver 100W (110/240V) 5 x dimmer DALI 5 x electrical cable 5m 10 x adjustable metal cable 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 5 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

20,3 kg

Codes

BZRC1750G15DBO
BZRC1750G15DNE
BZRC1750G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 28,3 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

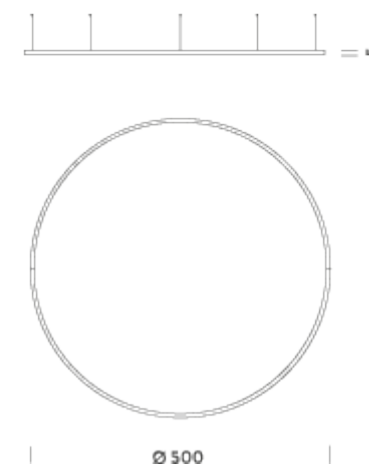

Ø 5M | DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	226W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	13847lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø500x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 10 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 5 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

Net lamp weight

15,9 kg

Codes

BZRC1650G15WBO
BZRC1650G15WNE
BZRC1650G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 23,9 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

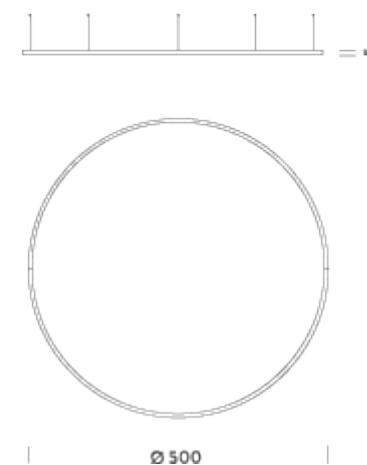

Ø 5M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	452W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	27695lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø500x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 5 x driver 100W (110/240V) 5 x dimmer DALI 5 x electrical cable 5m 10 x adjustable metal cable 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 5 pieces

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

20,3 kg

Codes

BZRC1750G15WBO
BZRC1750G15WNE
BZRC1750G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 28,3 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

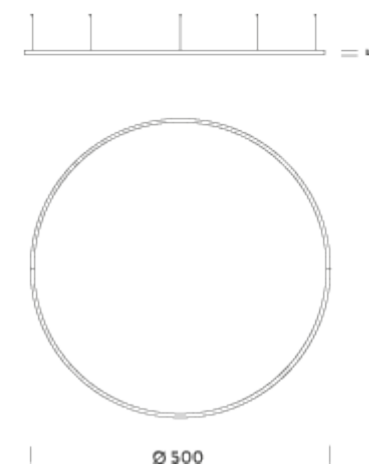

Ø 5M | DOWNLIGHT - 4000K - DALI

LAMPING

Source	LED strip
Total power	226W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	15386lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø500x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 10 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 5 pieces

Customization options

light configurations, separate light control, control systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

Net lamp weight

15,9 kg

Codes

BZRC1650G15NBO
BZRC1650G15NNE
BZRC1650G15NOR

Structure

white
black
gold

PACKAGE

Package 01





Dimension: 310x110x15 cm / Gross weight: 23,9 kg

Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

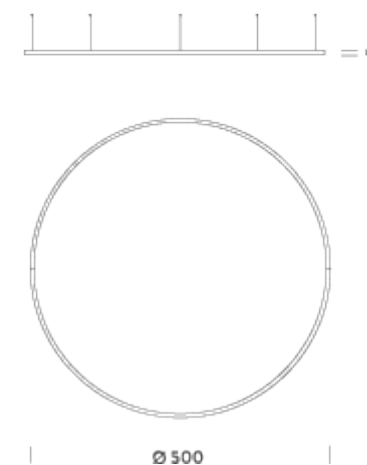

Ø 5M | UP-DOWNLIGHT - 4000K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
452W
Diffused orientable
DALI
24V
4000K
30772lm
68lm/W
SDCM<3
90
40
ø500x5cm
aluminium
0°C / +35°C
25°C
included: 5 x driver 100W (110/240V) | 5 x dimmer
DALI | 5 x electrical cable 5m | 10 x adjustable
metal cable 3m, ceiling attachment | remote driver |
RAL 9005 black | RAL 9016 white | shipped in 5
pieces

Customization options

light configurations, separate light control, control
systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Canopy box, 1
driver, 1 electrical cable | Ceiling plate, for false
ceiling
20,3 kg

Codes

BZRC1750G15NBO
BZRC1750G15NNE
BZRC1750G15NOR

Structure

white
black
gold

PACKAGE

Package 01

Dimension: 310x110x15 cm / Gross weight: 28,3 kg

Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

