


ZIRKOL LINEAR

Zirkol Linear è una famiglia di lampade lineare a sospensione ideale per l'illuminazione generale e decorativa di ambienti.

Corpo in alluminio anodizzato e schermo di protezione opale per un'illuminazione omogenea. CRI > 90.

L'emissione di luce può essere diretta o bi-emissione con alto flusso luminoso e con differenti temperature colore.

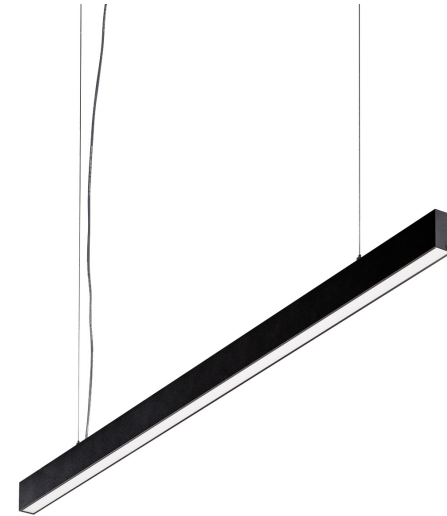

1M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	14,5W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	833lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1610G15DBO
BZRL1610G15DNE
BZRL1610G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | UP - DOWNLIGHT -2700K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1666lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1710G15DBO
BZRL1710G15DNE
BZRL1710G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	14,5W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	882lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1610G15WOB
BZRL1610G15WNE
BZRL1610G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | UP - DOWNLIGHT -3000K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	1764lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1710G15WBO
BZRL1710G15WNE
BZRL1710G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	14,5W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	980lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1610G15NBO
BZRL1610G15NNE
BZRL1610G15NOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | UP - DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	1960lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1710G15NBO
BZRL1710G15NNE
BZRL1710G15NNE

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



2M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1666lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1620G15DBO
BZRL1620G15DNE
BZRL1620G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | UP - DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	58W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3332lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1720G15DBO
BZRL1720G15DNE
BZRL1720G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	1764lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1620G15WBO
BZRL1620G15WNE
BZRL1620G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | UP - DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	58W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	3528lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1720G15WBO
BZRL1720G15WNE
BZRL1720G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	1960lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1620G15NBO
BZRL1620G15NNE
BZRL1620G15NOR

Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | UP - DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	58W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3920lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1720G15NBO
BZRL1720G15NNE
BZRL1720G15NOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni

