

ZIRKOL SPOT

ZIRKOL incarna il perfetto equilibrio tra design e illuminazione, combinazione che la rende irrinunciabile nel mondo dell'architettura. Ogni prodotto è disponibile in diverse finiture e dimensioni. Tutte le forme ZIRKOL sono realizzate con lo stesso profilo in alluminio per unire design ed estetica. Disponibile con emissione singola downlight e LED spot orientabili.



1M | 2700K - DALI

LAMPING

Source	strip LED + spot
Total power	60W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	3955lm
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium
Notes	

included: round canopy with 1 driver 75W
(110/240V) | 1x dimmer DALI | 1 electrical cable 4m
| 3x adjustable spots up to 90° | 3x adjustable
metal cables (length from 3m to 0,5m) ceiling
attachment included | RAL 9005 black | RAL 9016
white | 396lm for single spot | Shipped assembled


Codes

BZRCF610G15DBO
BZRCF610G15DNE
BZRCF610G15DOR

Structure

white
black
gold

Certificazioni

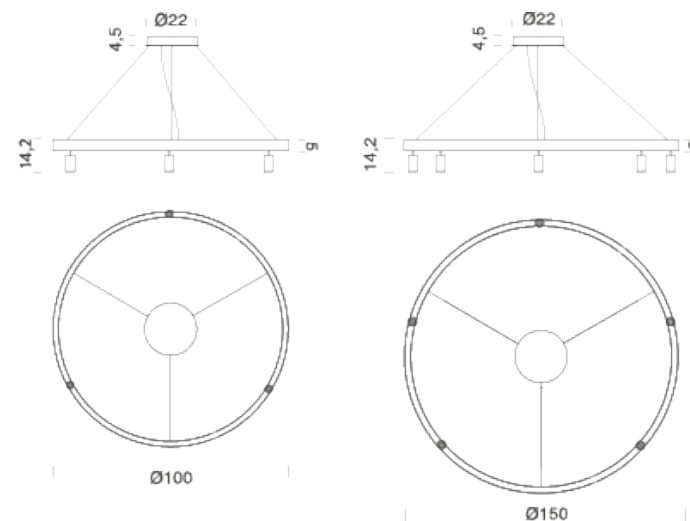

1M | 3000K - DALI

LAMPING

Source	strip LED + spot
Total power	60W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	4393lm
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium
Notes	

included: round canopy with 1 driver 75W (110/240V) | 1x dimmer DALI | 1 electrical cable 4m | 3x adjustable spots up to 90° | 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included | RAL 9005 black | RAL 9016 white | 396lm for single spot | Shipped assembled


Codes

BZRCF610G15WBO
BZRCF610G15WNE
BZRCF610G15WOR

Structure

white
black
gold

Certificazioni

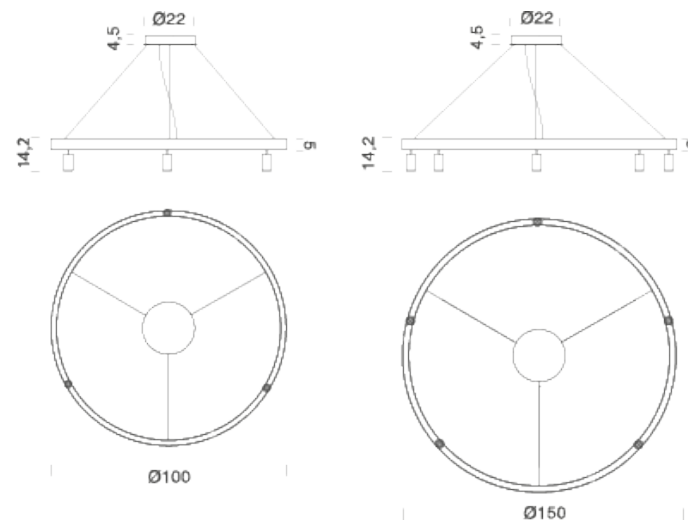

1,5M | 2700K - DALI

LAMPING

Source	strip LED + spot
Total power	93W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	5515lm
Typ CRI	90
IP class	40
Dimensions	ø150x5cm
Materials	aluminium
Notes	

included: round canopy with 1 driver 100W
(110/240V) | 1x dimmer DALI | 1 electrical cable 4m
| 5x adjustable spots up to 90° | 3x adjustable
metal cables (length from 3m to 0,5m) ceiling
attachment included | RAL 9005 black | RAL 9016
white | 396lm for single spot | Shipped assembled


Codes

BZRCF615G15DBO
BZRCF615G15DNE
BZRCF615G15DOR

Structure

white
black
gold

Certificazioni

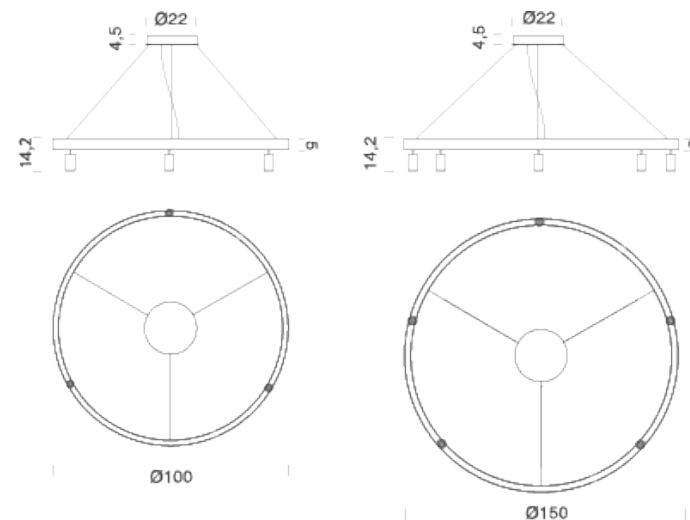

1,5M | 3000K - DALI

LAMPING

Source	strip LED + spot
Total power	93W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	6130lm
Typ CRI	90
IP class	40
Dimensions	ø150x5cm
Materials	aluminium
Notes	

included: round canopy with 1 driver 100W (110/240V) | 1x dimmer DALI | 1 electrical cable 4m | 5x adjustable spots up to 90° | 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included | RAL 9005 black | RAL 9016 white | 396lm for single spot | Shipped assembled

Codes

BZRCF615G15WBO
BZRCF615G15WNE
BZRCF615G15WOR

Structure

white
black
gold

Certificazioni

