


ZIRKOL SQUARE-Q

Zirkol Square-Q è una famiglia di lampade poligonali a sospensione ideale per l'illuminazione generale e decorativa di ambienti.

Corpo in alluminio anodizzato e schermo di protezione opale per un'illuminazione omogenea.

L'emissione di luce può essere diretta o bi-emissione con alto flusso luminoso e con tre differenti temperature colore.

Driver remoto e dimmer interface inclusi.

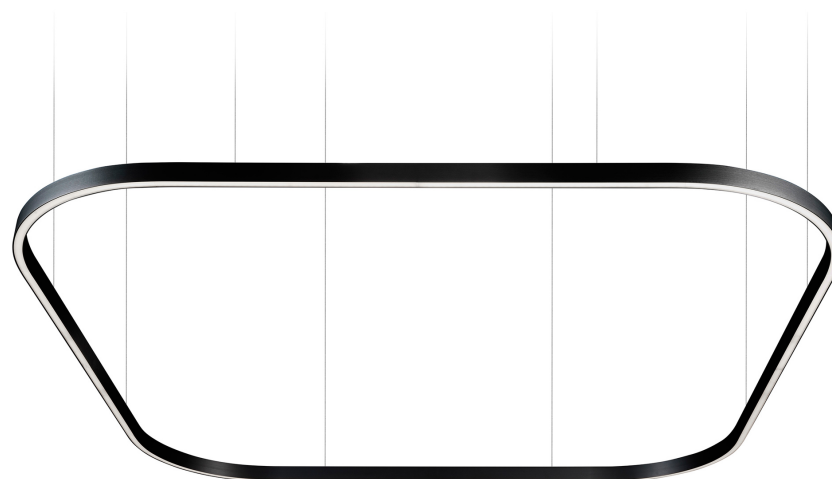

1,5X1,5M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	77W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	4432lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

Codes

BZRQ1606G15DBO
BZRQ1606G15DNE
BZRQ1606G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni

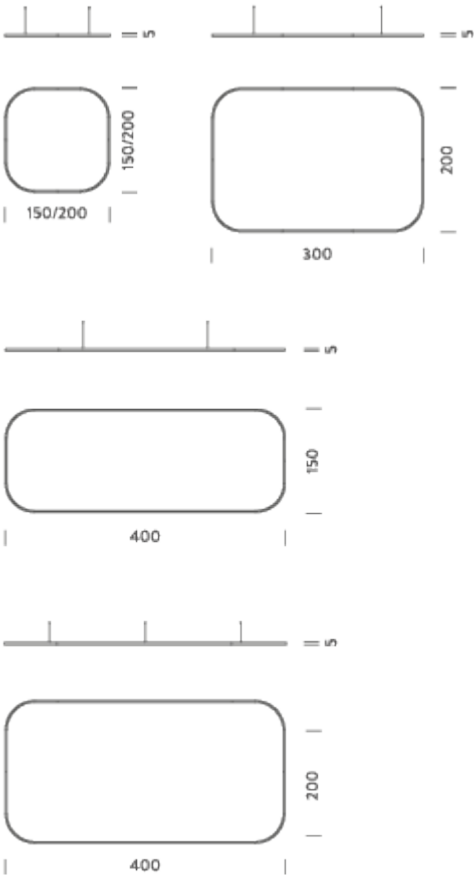

1,5X1,5M | UP - DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	154W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	8863lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

Codes

BZRQ1712G15DBO
BZRQ1712G15DNE
BZRQ1712G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni

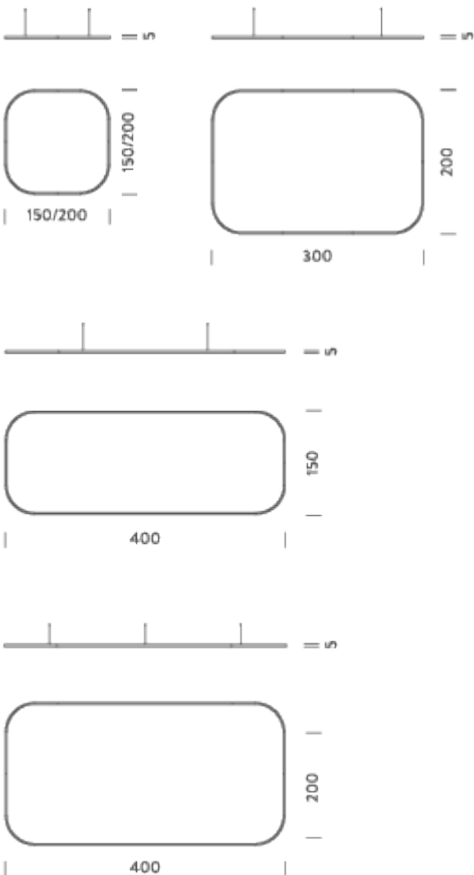

1,5X1,5M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	77W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	4692lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

Codes

BZRQ1606G15WBO
BZRQ1606G15WNE
BZRQ1606G15WOR

Structure


white
black
gold

PACKAGE

Package 01

Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni

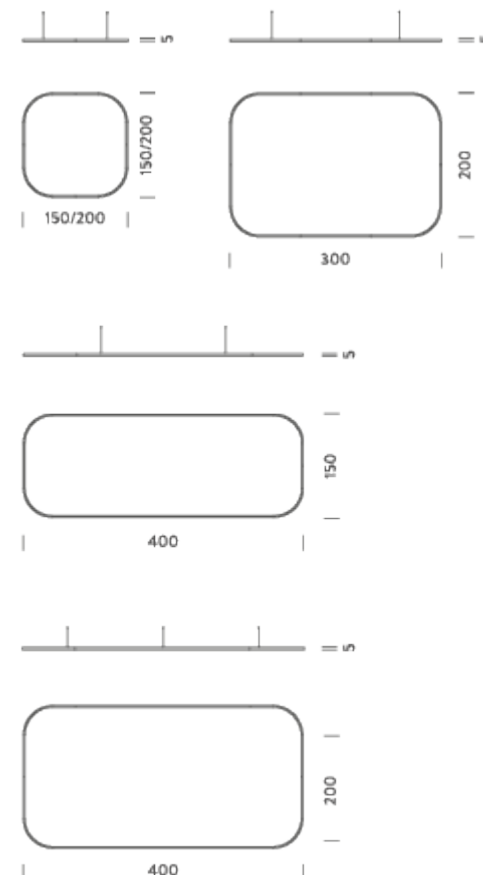

1,5X1,5M | UP - DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	154W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	9384lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

Codes

BZRQ1712G15WBO
BZRQ1712G15WNE
BZRQ1712G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni

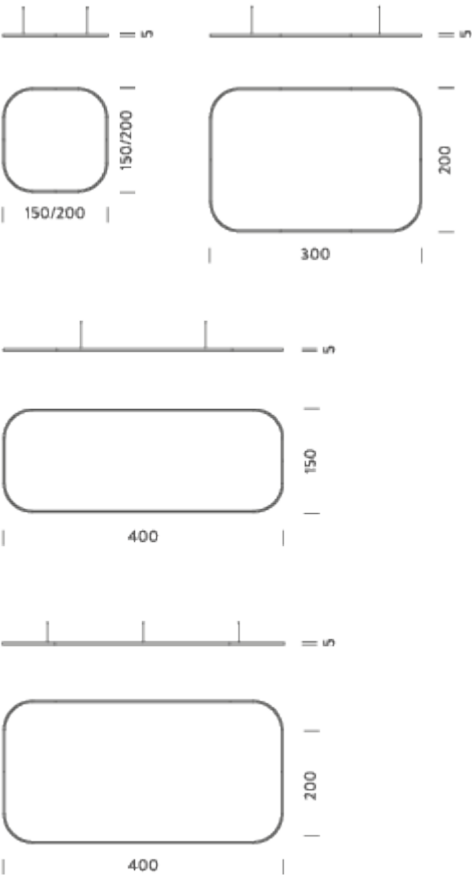

1,5X1,5M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	77W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	5214lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

Codes

BZRQ1606G15NBO
BZRQ1606G15NNE
BZRQ1606G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni

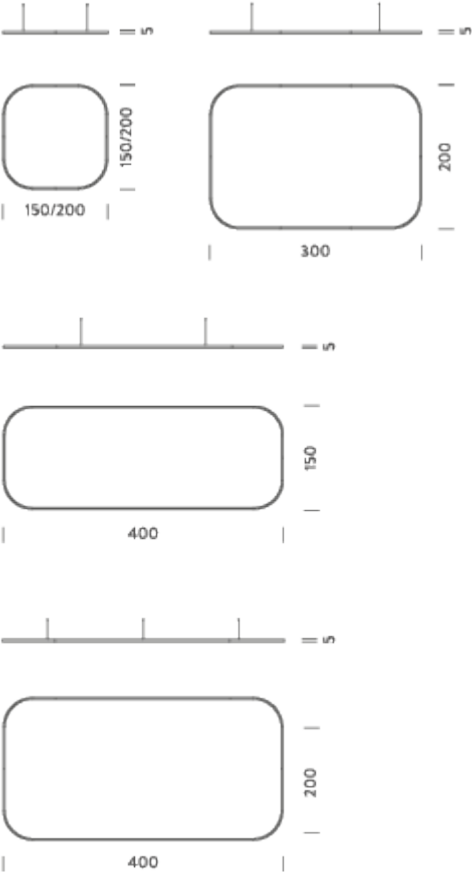

1,5X1,5M | UP - DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	154W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	10427lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	6,1 kg

Codes

BZRQ1712G15NBO
BZRQ1712G15NNE
BZRQ1712G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm / Gross weight: 9,6 kg

Certificazioni

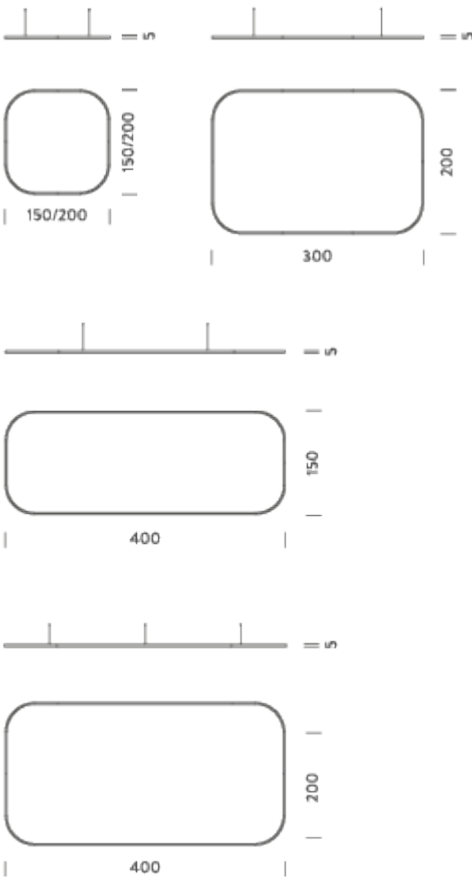

2X2M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	105W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	6098lm
Typ CRI	90
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 x driver 150W (220/240V) 1 x dimmer DAL 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	7,8 kg

Codes

BZRQ1608G15DBO
BZRQ1608G15DNE
BZRQ1608G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

Certificazioni

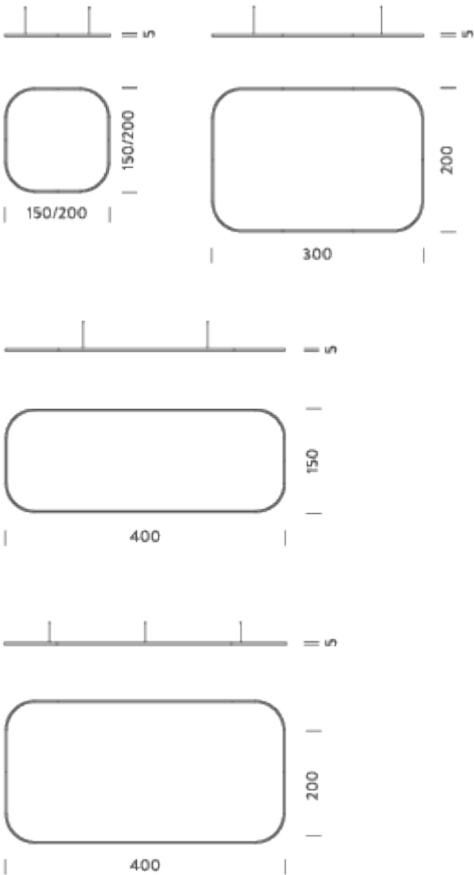

2X2M | UP - DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	211W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	12195lm
Typ CRI	90
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	8,1 kg

Codes

BZRQ1716G15DBO
BZRQ1716G15DNE
BZRQ1716G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,5 kg

Certificazioni

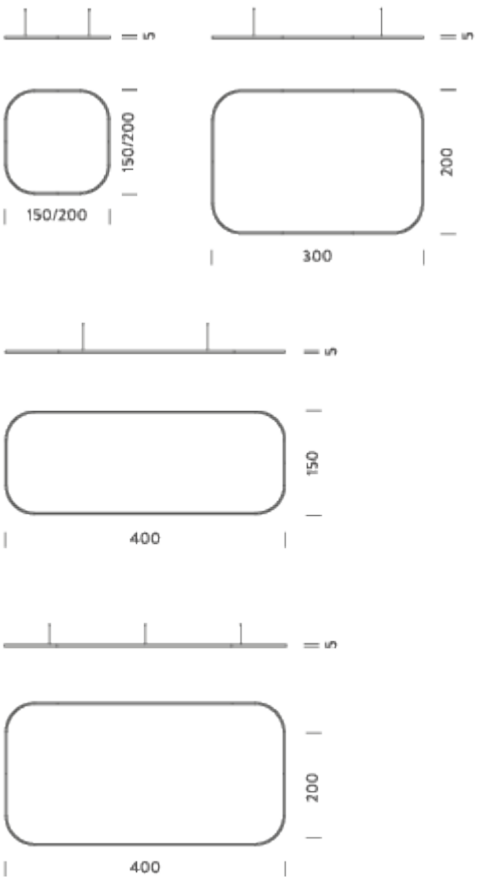

2X2M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	105W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	6456lm
Typ CRI	90
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 x driver 150W (220/240V) 1 x dimmer DAL 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	7,8 kg

Codes

BZRQ1608G15WBO
BZRQ1608G15WNE
BZRQ1608G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

Certificazioni

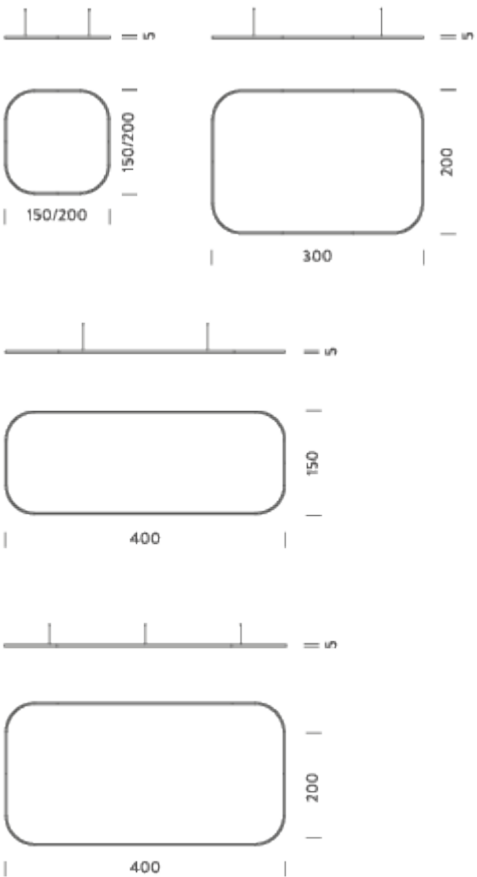

2X2M | UP - DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	211W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	12912lm
Typ CRI	90
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	8,1 kg

Codes

BZRQ1716G15WBO
BZRQ1716G15WNE
BZRQ1716G15WOR


Structure

white
black
gold

PACKAGE

Package 01
Dimension: 210x110x15 cm / Gross weight: 13,5 kg

Certificazioni

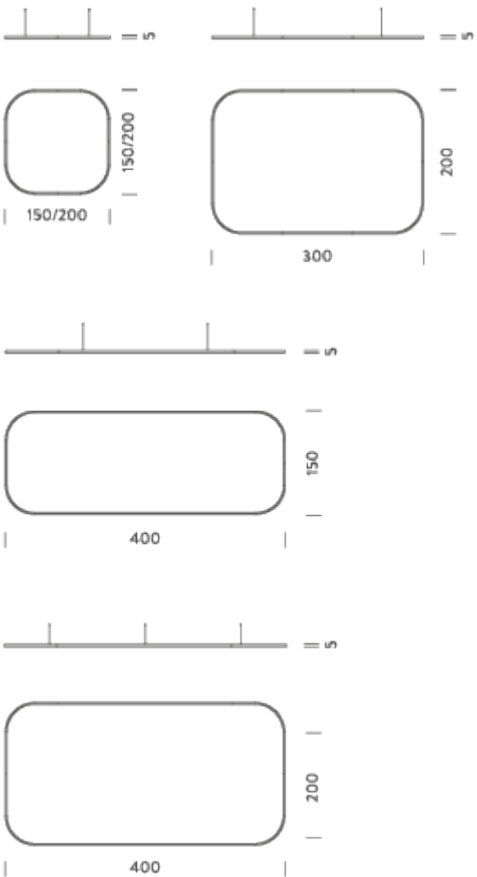

2X2M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	105W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	7174lm
Typ CRI	90
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 x driver 150W (220/240V) 1 x dimmer DAL 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	7,8 kg

Codes

BZRQ1608G15NBO
BZRQ1608G15NNE
BZRQ1608G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,2 kg

Certificazioni

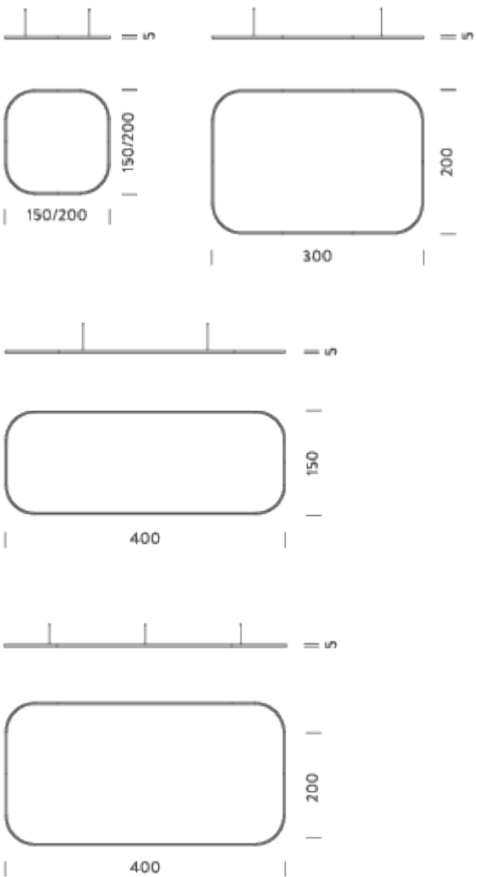

2X2M | UP - DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	211W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	14347lm
Typ CRI	90
IP class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	8,1 kg

Codes

BZRQ1716G15NBO
BZRQ1716G15NNE
BZRQ1716G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm / Gross weight: 13,5 kg

Certificazioni

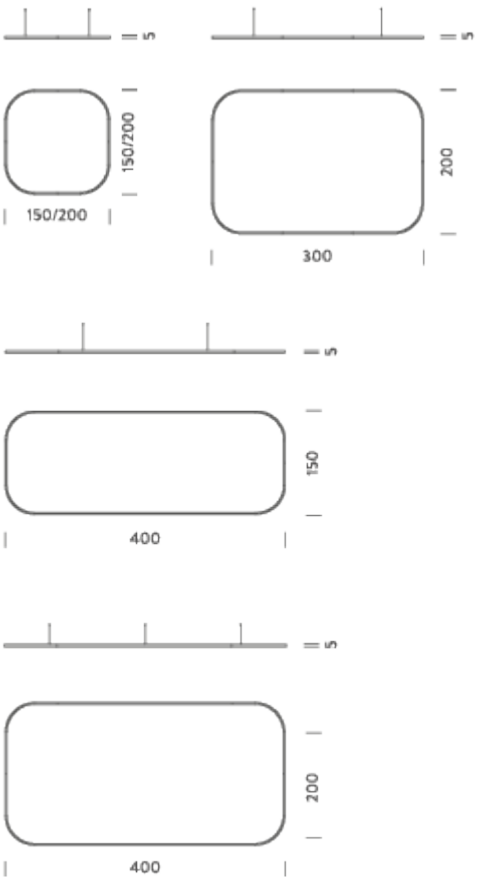

3X2M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	7764lm
Typ CRI	90
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 1 x driver 150W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

Codes

BZRQ1610G15DBO
BZRQ1610G15DNE
BZRQ1610G15DOR


Structure

white
black
gold

PACKAGE

Package 01
Dimension: 310x110x15 cm / Gross weight: 17,9 kg

Certificazioni

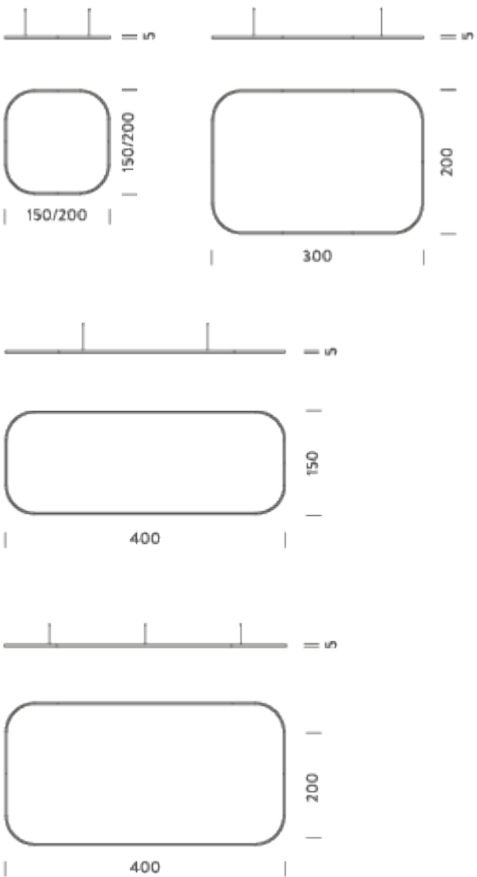

3X2M | UP - DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	15527lm
Typ CRI	90
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 x drivers 150W (220/240V) 2 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

Codes

BZRQ1720G15DBO
BZRQ1720G15DNE
BZRQ1720G15DOR

PACKAGE

Package 01


Certificazioni



Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 18,7 kg

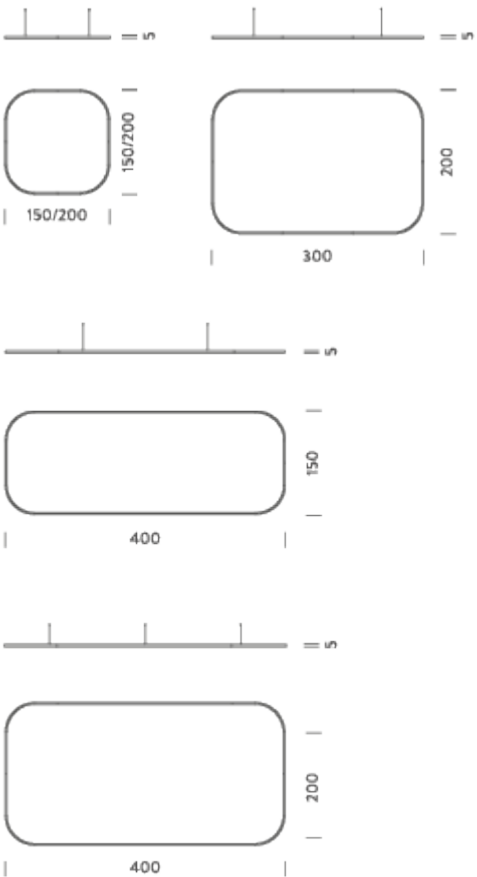

3X2M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	8220lm
Typ CRI	90
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 1 x driver 150W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

Codes

BZRQ1610G15WBO
BZRQ1610G15WNE
BZRQ1610G15WOR


Structure

white
black
gold

PACKAGE

Package 01
Dimension: 310x110x15 cm / Gross weight: 17,9 kg

Certificazioni

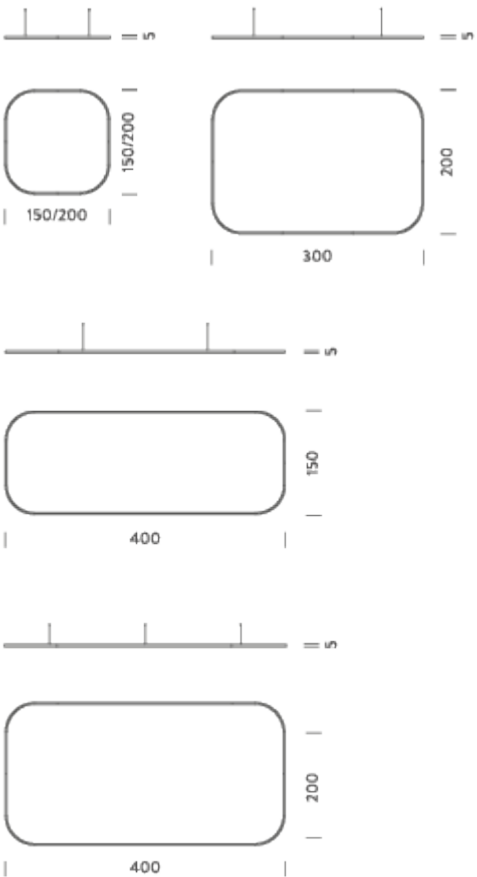

3X2M | UP - DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	16440lm
Typ CRI	90
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 x drivers 150W (220/240V) 2 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

Codes

BZRQ1720G15WBO
BZRQ1720G15WNE
BZRQ1720G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 18,7 kg

Certificazioni

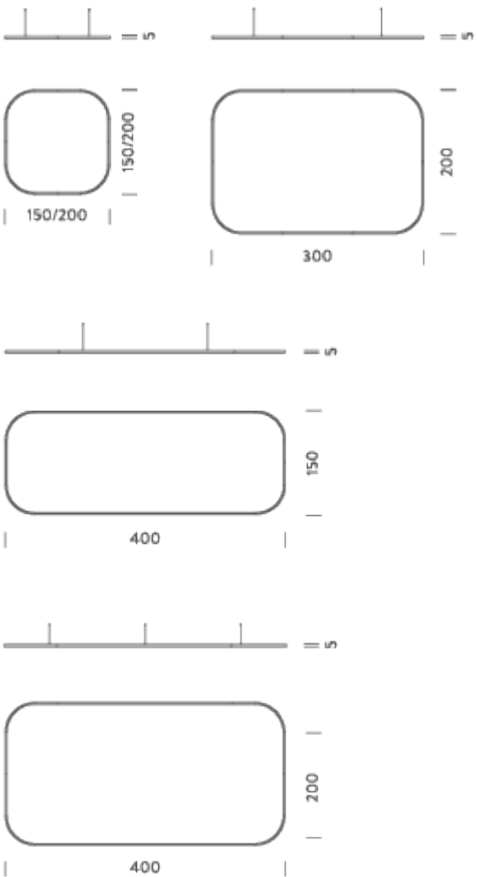

3X2M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	9134lm
Typ CRI	90
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 1 x driver 150W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	9,9 kg

Codes

BZRQ1610G15NBO
BZRQ1610G15NNE
BZRQ1610G15NOR

PACKAGE


Package 01

Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 17,9 kg

Certificazioni

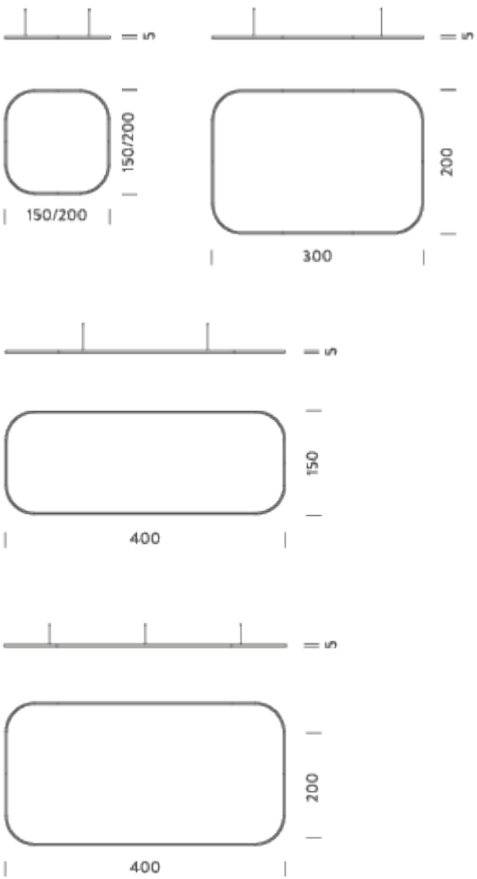

3X2M | UP - DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	18267lm
Typ CRI	90
IP class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	included: 2 x drivers 150W (220/240V) 2 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	10,7 kg

Codes

BZRQ1720G15NBO
BZRQ1720G15NNE
BZRQ1720G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 18,7 kg

Certificazioni

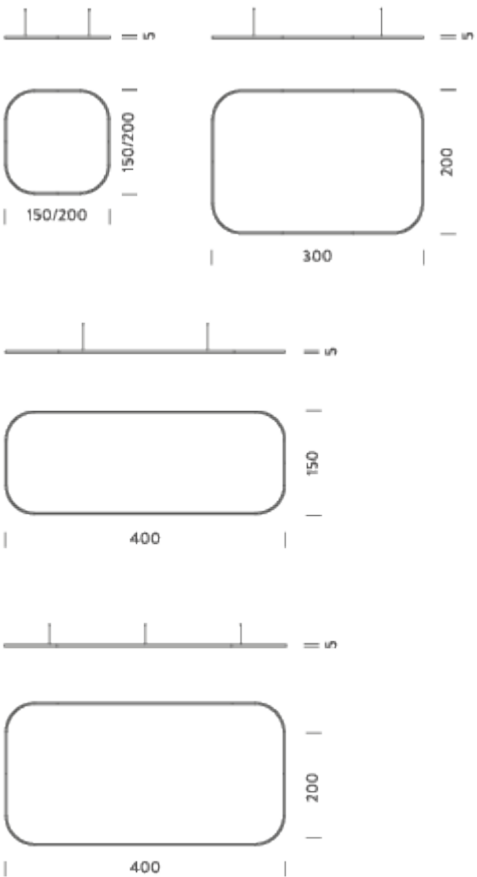

4X1,5M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	149W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	8597lm
Typ CRI	90
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	11,3 kg

Codes

BZRQ1611G15DBO
BZRQ1611G15DNE
BZRQ1611G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 19,3 kg

Certificazioni

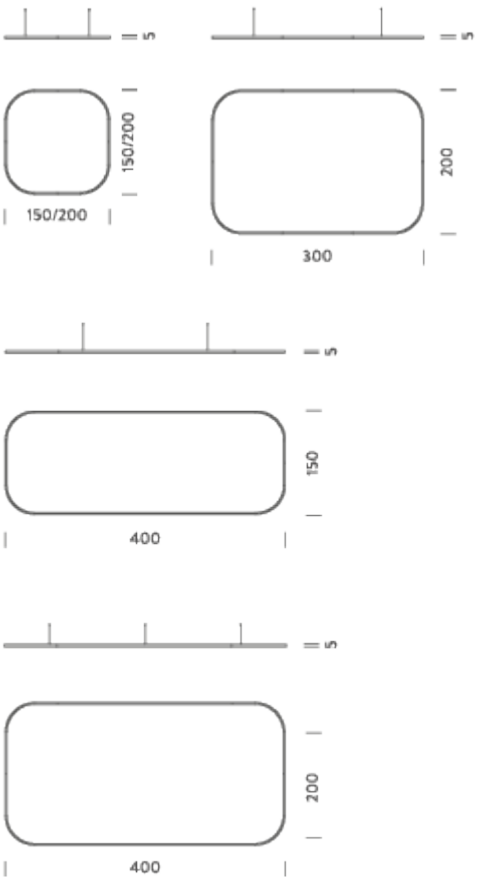

4X1,5M | UP - DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	297W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	17193lm
Typ CRI	90
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 x drivers 150W (220/240V) 2 x dimmer DALI 4 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	12,1 kg

Codes

BZRQ1722G15DBO
BZRQ1722G15DNE
BZRQ1722G15DOR

PACKAGE

Package 01


Certificazioni



Structure

white
black
gold

Dimension: 310x110x15 cm / Gross weight: 20,1 kg

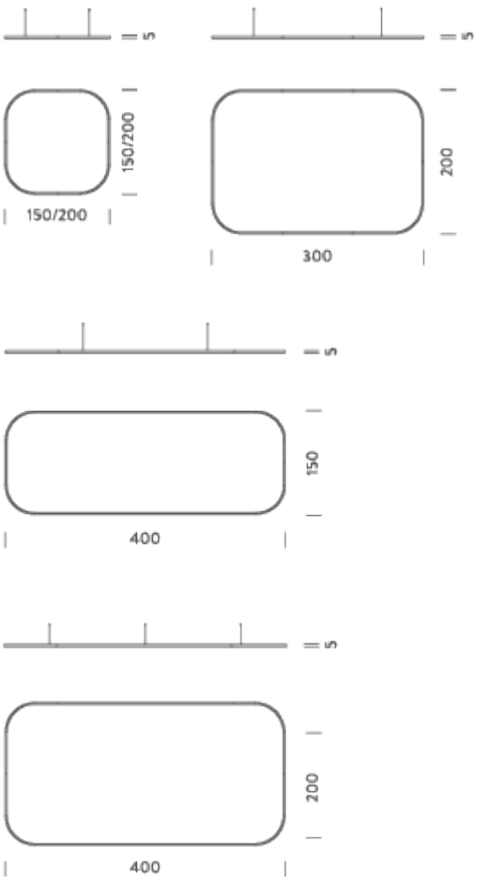

4X1,5M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	149W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	9102lm
Typ CRI	90
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	11,3 kg

Codes

BZRQ1611G15WBO
BZRQ1611G15WNE
BZRQ1611G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 19,3 kg

Certificazioni

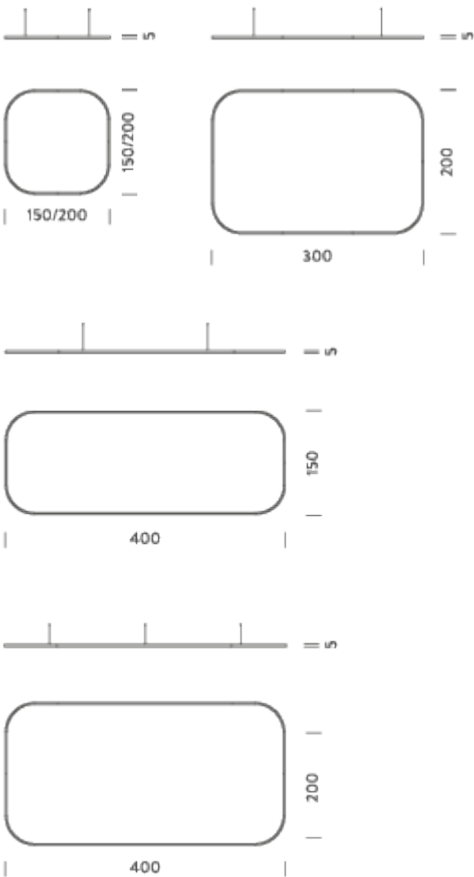

4X1,5M | UP - DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	297W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	18204lm
Typ CRI	90
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 x drivers 150W (220/240V) 2 x dimmer DALI 4 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	12,1 kg

Codes

BZRQ1722G15WBO
BZRQ1722G15WNE
BZRQ1722G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,1 kg

Certificazioni

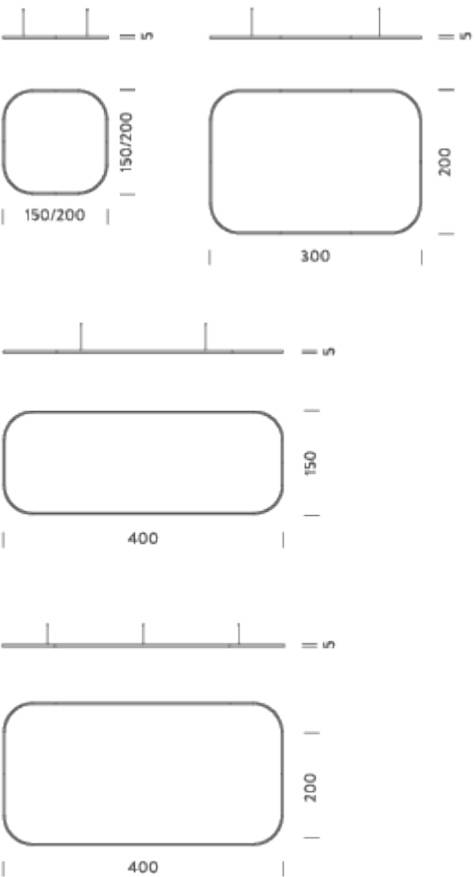

4X1,5M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	149W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	10114lm
Typ CRI	90
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	11,3 kg

Codes

BZRQ1611G15NBO
BZRQ1611G15NNE
BZRQ1611G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 19,3 kg

Certificazioni

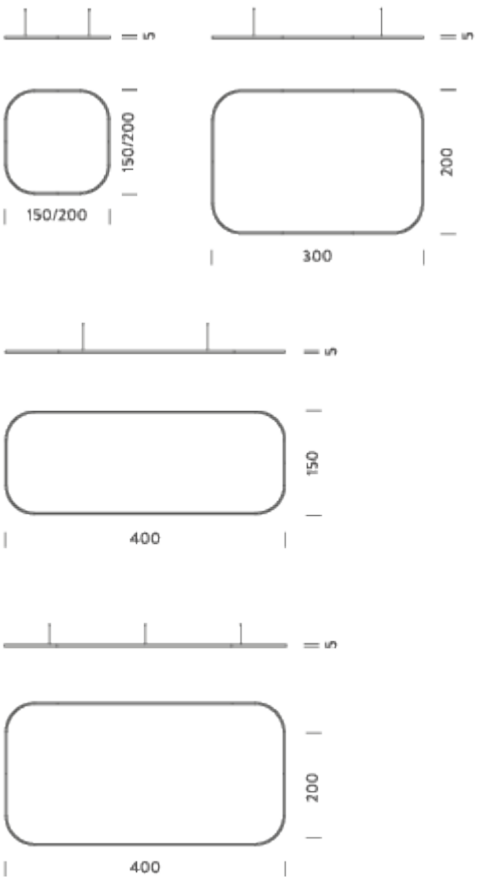

4X1,5M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	20227lm
Typ CRI	90
IP class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	included: 2 x drivers 150W (220/240V) 2 x dimmer DALI 4 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling
Net lamp weight	12,1 kg

Codes

BZRQ1722G15NBO
BZRQ1722G15NNE
BZRQ1722G15NOR


Structure

white
black
gold

PACKAGE

Package 01
Dimension: 310x110x15 cm / Gross weight: 20,1 kg

Certificazioni

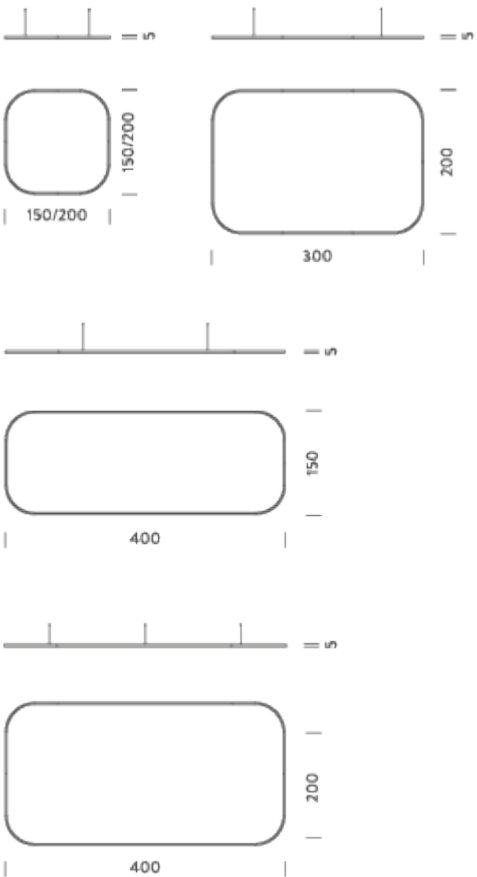

4X2M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	163W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	9430lm
Typ CRI	90
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	12,3 kg

Codes

BZRQ1612G15DBO
BZRQ1612G15DNE
BZRQ1612G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni

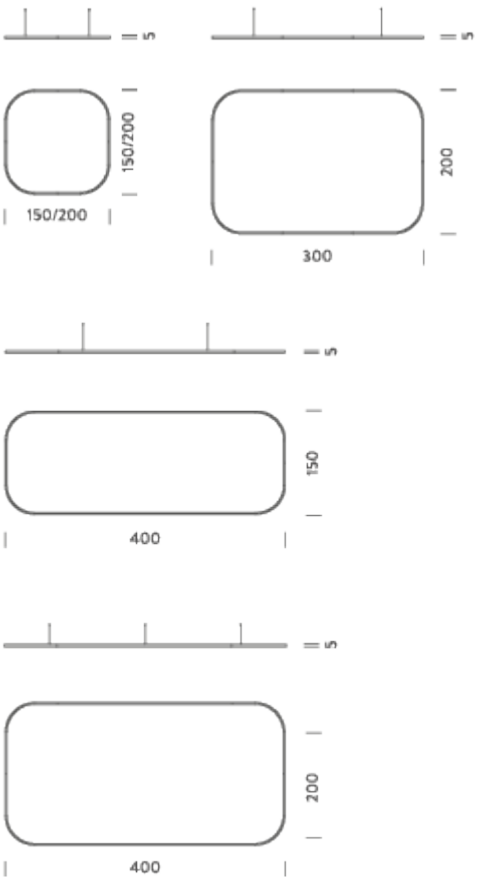

4X2M | UP - DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	326W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	18859lm
Typ CRI	90
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 x driver 250W (220/240V) 2 x dimmer DALI 4 x electrical cable length 5m 6 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

Codes

BZRQ1724G15DBO
BZRQ1724G15DNE
BZRQ1724G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 21,2 kg

Certificazioni

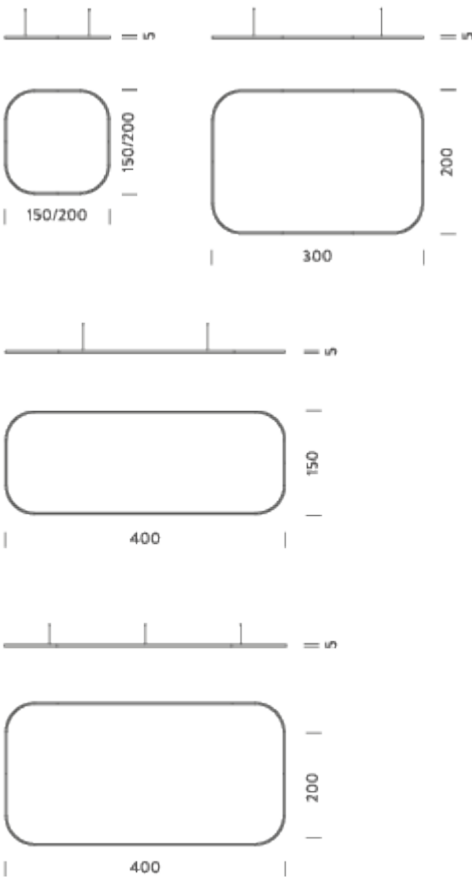

4X2M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	163W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	9984lm
Typ CRI	90
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	12,3 kg

Codes

BZRQ1612G15WBO
BZRQ1612G15WNE
BZRQ1612G15WOR

Structure


white
black
gold

PACKAGE

Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni

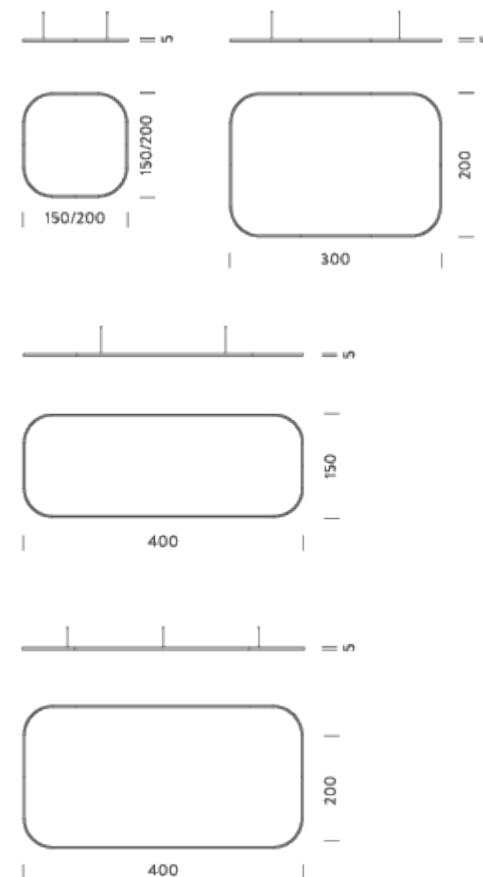

4X2M | UP - DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	326W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	19968lm
Typ CRI	90
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	included: 2 x driver 250W (220/240V) 2 x dimmer DALI 4 x electrical cable length 5m 6 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	E
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

Codes

BZRQ1724G15WBO
BZRQ1724G15WNE
BZRQ1724G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 21,2 kg

Certificazioni

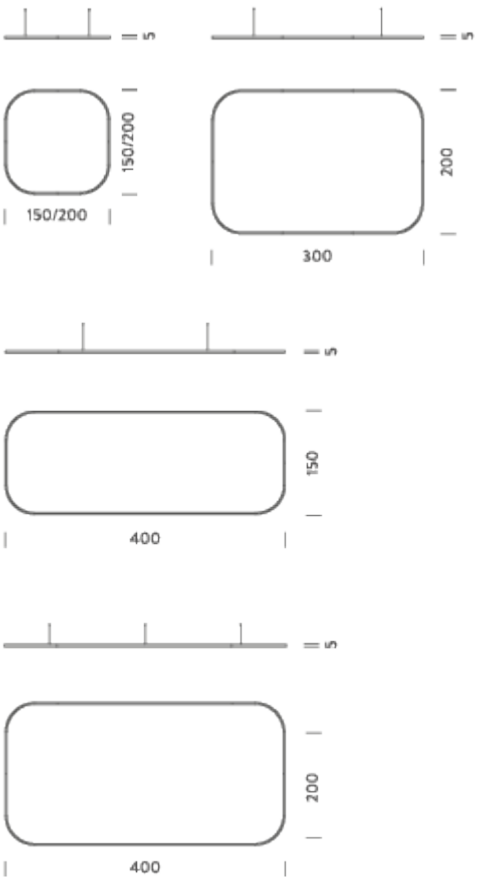

4X2M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	163W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	11094lm
Typ CRI	90
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Ambient temperature range	0°C / 35°
Performance ambient temperature	25°
Notes	

included: 2 x driver 100W (110/240V) | 2 x dimmer DALI | 4 x electrical cable 5m | 6 x adjustable metal cable length 3m (including ceiling attachment) | remote driver | RAL 9005 black | RAL 9016 white | shipped in 4 pieces

Customization options

light configurations, separate light control, control systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Ceiling plate, for false ceiling

Net lamp weight

12,3 kg

Codes

BZRQ1612G15NBO
BZRQ1612G15NNE
BZRQ1612G15NOR

Structure


white
black
gold

PACKAGE

Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg

Certificazioni

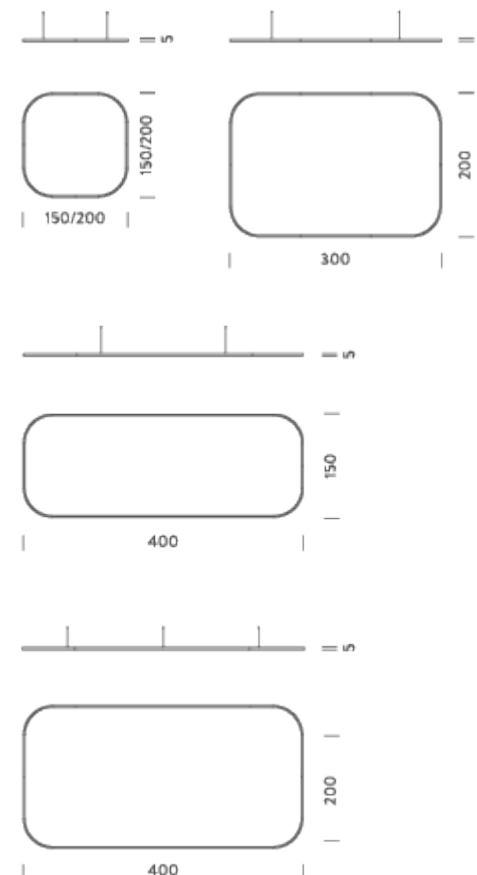

4X2M | UP - DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	326W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	22187lm
Initial luminaire efficacy	35lm/W
Typ CRI	90
IP class	40
Dimensions	400x200x5cm
Materials	Aluminium
Ambient temperature range	0°C / 35°
Performance ambient temperature	25°
Notes	included: 2 x driver 250W (220/240V) 2 x dimmer DALI 4 x electrical cable length 5m 6 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces
Customization options	light configurations, separate light control, control systems
Energy class	D
Accessories	Canopy, for concrete ceiling Ceiling plate, for false ceiling
Net lamp weight	13,2 kg

Codes

BZRQ1724G15NBO
BZRQ1724G15NNE
BZRQ1724G15NOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm / Gross weight: 21,2 kg

Certificazioni

