

MINIFLUX LINEA OPAL

Miniflux Linea Opal is a pendant LED system for indoor. High-emission LED strip (24V DC) installed in an aluminium profile. CRI>97. Opal polycarbonate diffuser for homogeneous light emission. Available in the finishes black, red and gold and in two color temperatures. TRIAC and DALI versions. Remote power supply included.



TRIAC | 2700K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	2700K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08

Notes

included: canopy with 1 x driver | 1 x electrical cable 3m | 2 x adjustable metal cables 2m | driver included | canopy RAL 9005 black for black finish | canopy RAL 9016 white for red/gold finish

Customization options

Net lamp weight

tube length

0.6 kg

Codes

BMLO2710G26DAN

BMLO2710G26DAR

BMLO2710G26DAO


Structure

black

red

gold

Certificazioni

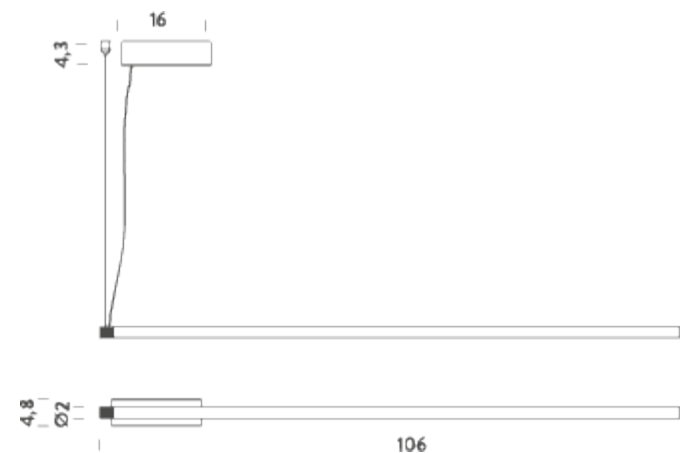

TRIAC | 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused orientable
Switching	TRIAC
Tension	24V
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options
Net lamp weight

included: canopy with 1 x driver | 1 x electrical cable 3m | 2 x adjustable metal cables 2m | driver included | canopy RAL 9005 black for black finish | canopy RAL 9016 white for red/gold finish
tube length
0,6 kg

Codes

BMLO2710G26WAN
BMLO2710G26WAR
BMLO2710G26WAO

Structure


black
red
gold

PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

Certificazioni

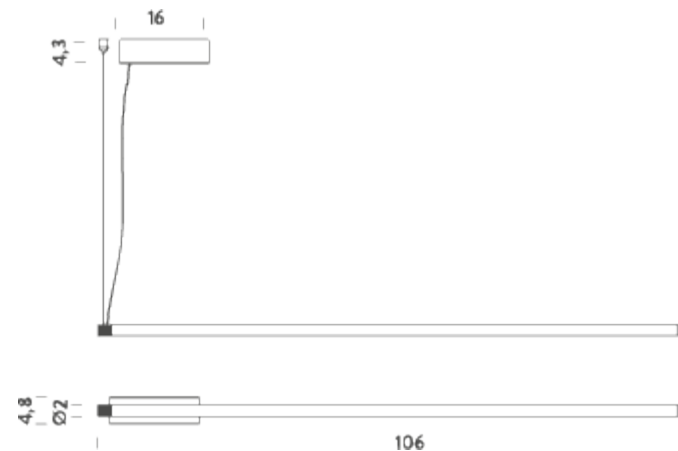

DALI | 2700K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08

Notes

included: canopy with 1 x driver | 1 x electrical cable 3m | 2 x adjustable metal cables 2m | driver included | canopy RAL 9005 black for black finish | canopy RAL 9016 white for red/gold finish

Customization options

Net lamp weight

tube length

0,6 kg

Codes

BMLO1610G26DAN

BMLO1610G26DAR

BMLO1610G26DAO

Structure

black

red


gold

PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

Certificazioni

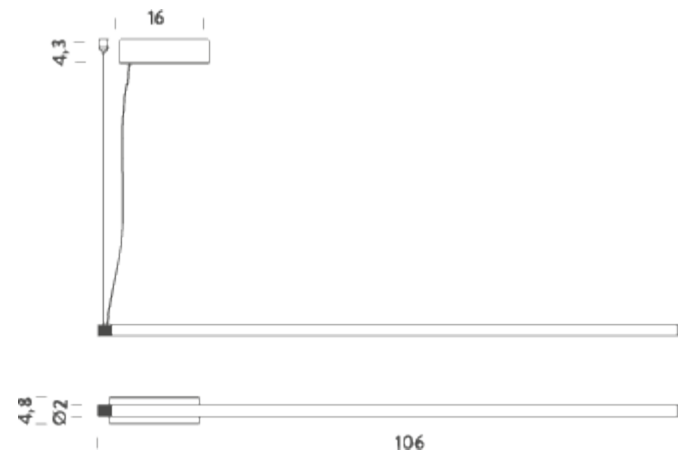

DALI | 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options
Net lamp weight

included: canopy with 1 x driver | 1 x electrical cable 3m | 2 x adjustable metal cables 2m | driver included | canopy RAL 9005 black for black finish | canopy RAL 9016 white for red/gold finish
tube length
0,6 kg

Codes

BMLO1610G26WAN
BMLO1610G26WAR
BMLO1610G26WAO

Structure

black
red
gold

PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

Certificazioni

